


HAUG Ionization - for the elimination of electrostatic charges




Ring electrode

With their extensive and fully developed technology, ring electrodes provide a wide-ranging neutralizing effect. The plastic processing industry recognizes them as an essential production aid with innumerable applications.

The radial and central alignment of the electrode as well as a symmetrical choice of ions, together with large spacious punch-through guarantee maximum efficiency and performance.

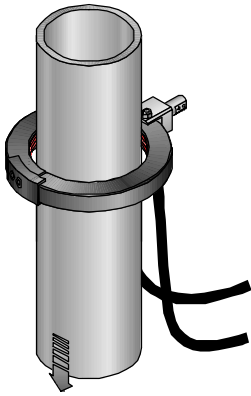

A On an extruder:
Plastic tube manufacture

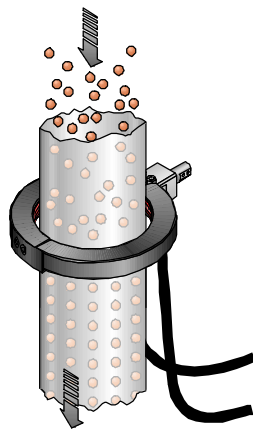


B Packing industry:
Filling machines

Particular characteristics and advantages

- Simple opening and closing:
The two-part ring electrode can be opened for a short period of time during machine setting up. During production, for instance, this enables quick and uncomplicated changing of the film.
- Small, but good:
Minimal dimensions guarantee a wide field of application with the most diverse types of machines.
- Safe to operate:
The high voltage parts are encapsulated and absolutely safe to touch.
- Simple installation:
The patented, co-axial HAUG-Quick connecting system X-2000 guarantees assembly/installation in seconds, without tools.

The ring electrode, with air support, can also be supplied as a ring ionizer.

iii. 1

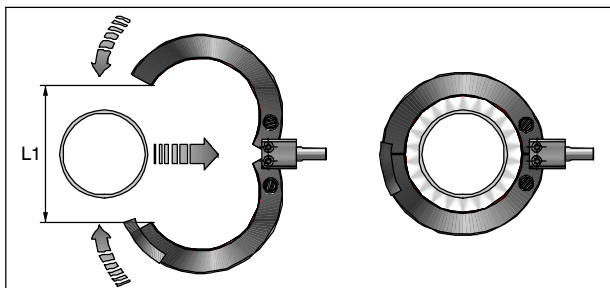


EI RE

Industries

The following industries represent just a few of the areas where application of the ring electrode has repeatedly proven its value:

- A Plastic industry:** on an extruder, during manufacture of plastic tubes, profiles, half-shells and bars and on plastic blow-moulding machines.
- B Packing industry:** on filling machines
- C Film/foil industry:** during manufacture of plastic bags.

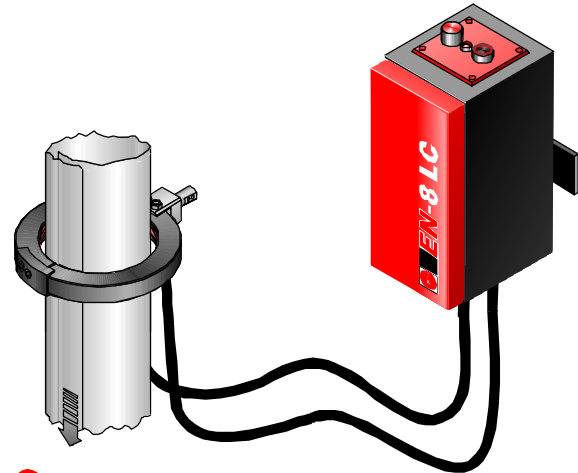

C Film/foil industry:
during manufacture of plastic bags

Accessories

Original HAUG parts form the basis for problems-free production processes and a long installation life:

- High voltage cable
- Pneumatic hoses, type 4615, made to customer's requirements
- Compact filter control valve used for oil-water separators type 7224

HAUG GmbH & Co. KG

Germany

Friedrich-List-Str. 18
D-70771 Leinf.-Echterdingen
Phone: +49 711 / 94 98-0
Telefax: +49 711 / 94 98-298

www.haug.de
E-mail: info@haug.de

HAUG Biel AG

Switzerland

Johann-Renfer-Str. 60
CH-2500 Biel-Bienne 6
Phone: +41 32 / 344 96 96
Telefax: +41 32 / 344 96 97

www.haug-ionisation.com
E-mail: info@haug-biel.ch

Static Line - Ring electrode EI RE





EI RE

Technical data EI RE

Types: **EI RE 014 200** Order-No.:14.8114.000
External diameter: 140 mm
Internal diameter: 100mm

EI RE 018 200 Order-No.:14.8114.001
External diameter: 180 mm
Internal diameter: 140mm

EI RE 024 200 Order-No.:14.8114.002
External diameter: 240 mm
Internal diameter: 200mm

Special dimensions onrequest

Range: **EI RE 014200** approx. 80 mm – 20 mm
EI RE 018200 approx. 120 mm – 60 mm
EI RE 024200 approx. 180 mm – 120 mm

Opening dimension L1: **EI RE 014200** openedapprox. 20mm
EI RE 018200 openedapprox. 120mm
EI RE 024200 openedapprox. 180mm

Cross-section: approx. 18 mm x 20 mm

Operating temperature: +5 °C to +45 °C

Storage/transporttemperature: -15 °C to +60 °C

Smallest bendingradius (cable): R 50

Subjecttotechnicalchanges!

Suitable power packs

Connectablelengths (ionizing unitincl.high-voltage cable):

ENSL max. 5 m
ENSLLC max. 10 m
EN8 max. 18 m
EN8LC max. 18 m
Multistat max. 18 m
EN70/EN70LC max. 2 x 18 m

