


OPTICAL INCREMENTAL ENCODERS, DXM5S – STAINLESS STEEL 316 - IP69K

- Adapted to food and beverage – pharmaceutical - river – offshore applications,
- Stainless steel encoder (316) with hygienic design,
- Flanges and shaft adapted to the market needs,
- Robustness and excellent resistance to shocks / vibrations,
- Double ball bearings with safety lock system,
- Solid shaft version $\varnothing 10$ mm,
- High protection level IP69K,
- Universal power supply 5 to 30Vdc,
- Industrial standard electronic RS422/TTL and HTL,
- High performances in temperature -30°C to $+100^{\circ}\text{C}$,
- Optical technology, contactless,
- Resolutions available : up to 80 000 ppr,
- Adapted axial cable gland output.



DXM5S10 DIMENSIONS

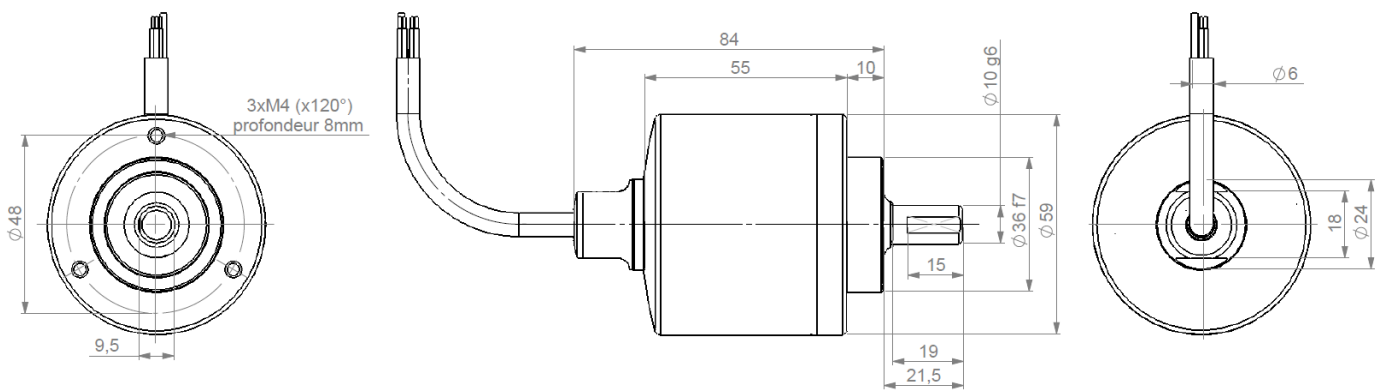


MECHANICAL CHARACTERISTICS


Material	Shaft: Stainless steel 316
	Cover: Stainless steel 316
	Body: Stainless steel 316
Bearings	Double ball bearings
Maximal loads	Axial : 250 N
	Radial : 500 N
Theoretical mechanical lifetime 10^9 turns (F_{axial} / F_{radial}) 50 N / 100 N : 12 250 N / 500 N : 0,5	
Permissible max. speed	4 000 min ⁻¹
Continuous max. speed	3 000 min ⁻¹

Shaft inertia	$\leq 1,2 \cdot 10^{-6}$ kg.m ²
Torque	$\leq 90 \cdot 10^{-3}$ N.m
Shock (EN60068-2-27)	$\leq 500 \text{ m.s}^{-2}$ (during 6 ms)
Vibration (EN60068-2-6)	$\leq 100 \text{ m.s}^{-2}$ (55 ... 2 000 Hz)
Encoder weight (approx.)	0,600 kg
Protection(EN 60529)	IP 69K
EMC	EN 50081-1, EN 61000-6-2
Isolation	1 000 Veff
Operating temperature	$-30 \dots +100^{\circ}\text{C}$ (encoder T°)
Storage temperature	$-40 \dots +100^{\circ}\text{C}$


DIGITAL OUTPUT SIGNALS (SQUARE WAVE SIGNALS)




Electronic 2G2 (100°C, 300kHz)
Supply : 5Vdc ± 10%
Cons. without load : 75mA max
Current per channel : 40mA max
0 max (Is=20mA) : $V_{ol} = 0,5Vdc$
1 min (Is=20mA) : $V_{oh} = 4Vdc$



Electronic PG5 (100°C, 300kHz)
Supply : 5 to 30Vdc
Cons. without load : 75mA max
Current per channel : 40mA max
0 max (Is=20mA) : $V_{ol} = 0,5Vdc$
1 min (Is=20mA) : $V_{oh} = V_{cc} - 2,5Vdc$




Electronic RG2 (100°C, 300kHz)
Supply : 4,75 to 30Vdc
Cons. without load : 75mA max
Current per channel : 40mA max
0 max (Is=20mA) : $V_{ol} = 0,5Vdc$
1 min (Is=20mA) : $V_{oh} = 4Vdc$



Electronic 5GT (70°C, 120kHz)
Supply : 11 to 30Vdc
Cons. without load : 75mA max
Current per channel : 40mA max
0 max (Is=20mA) : $V_{ol} = 1,5Vdc$
1 min (Is=20mA) : $V_{oh} = V_{cc} - 2,5Vdc$

SINE WAVE OUTPUT SIGNALS



Electronic 2WT (100°C)
Supply : 5Vdc ± 10%
Cons. without load : 75mA max
Output signals :
1Vpp (peak to peak)

ELECTRONIC PROTECTIONS

Protection against short circuits of the electronics: 2G2, RG2, PG5, 5GT and 2WT
Protection against reverse polarity for all the electronics except 2G2 and 2WT

Consult us for special electronics : programmable resolution, 5 to 36Vdc, 100mA per channel...

CONNECTIONS

Type	Cable	0Vdc	+Vcc	A	B	0	A/	B/	0/	Ground
G3	PVC cable 8 wires 8230/020	WH white	BN brown	GN green	YE yellow	GY grey	PK pink	BU blue	RD red	General shielding

ORDERING REFERENCE (Contact the factory for special versions, ex: electronics 5-36V, special flanges, connections...)

Type	Shaft Ø	Mechanics	Digital signals (Square wave)			Cable	Connection orientation	
			Electronics : 2G2, PG5, RG2, 5GT	Output signals	Resolution			
DXM5S Optical – stainless steel 58mm encoder	10 10mm	AA 316 stainless steel IP69K Hygienic design	Supply	Output stage	9 : A,A/,B,B/,0,0/ (0 gated A & B)	G3 PVC cable 8 wires	Example : A020 axial cable 2m	
			2 : 5Vdc 5 : 11 to 30Vdc P : 5 to 30Vdc R : 4.75 to 30Vdc	G2 : driver 5Vdc RS422 G5 : push-pull GT : transistorized push-pull				80 000 max
			Sine-wave signals					
Ex:DXM5S	10 /	AA /	R	G2	9 //	08 192 //	G3	A050

AVAILABLE RESOLUTIONS

Available resolutions (100°C electronic) : 50 60 100 120 125 127 150 180 200 240 250 256 300 314 360 375 400 500 512 600 720 750 768 800 927 1000 1024 1200 1250 1280 1440 1500 1800 2000 2048 2400 2500 3000 3600 4000 4096 5000 6000 7200 8000 8192 10000

Interpolated available resolutions (70°C electronic) : 1080 2560 2880 3072 4320 5120 7500 5760 9000 10240 10800 12000 12500 12288 14400 15000 16000 16384 18000 20000 20480 24000 25000 28800 30000 32000 32768 36000 40000 40960 43200 48000 49152 50000 57600 60000 64000 65536 80000

Available resolutions sine-wave signals (100°C electronic) : 250 256 360 500 1024 2500

Nota : The maximal resolution with the 5GT electronic is 5 000 pulses per turn (non available electronic with interpolation).

Made in France