

NICKELBALGKUPPLUNG NICKEL BELLOWS COUPLING BKNK 1733/2537



Klemmnaben


Clamping hubs

Technische Daten / technical data		BKNK 1733	BKNK 2537
max. Drehzahl / max. speed	min ⁻¹	10.000	10.000
max. Drehmoment / max. torque	Ncm	39	328
max. Wellenversatz / max. offset off shafts			
radial / radial	mm	± 0,72	± 0,46
axial / axial	mm	± 3,09	± 2,77
angular / angular	Grad	± 14	± 8
Drehfedersteife / torsion spring stiffness	Nm/rad	80	462
Radialfedersteife / radial spring stiffness	N/mm	5,8	38,1
Trägheitsmoment / moment of inertia	gcm ²	4,89	2,54
max. M der Schrauben / max. clamping torque	Ncm	35	66
Temperaturbereich / temperature range	°C	-30 / +120	-30 / +120
Gewicht ca. / weight appr.	g	11,5	28,5
Werkstoff / material	Flansch / flange	Aluminium, eloxiert / aluminium, anodised	
Werkstoff / material	Balg / bellows	Nickel / nickel	




M = Anzugsmoment der Klemmschraube/ tightening torque of the clamping screw

BKNK 1733

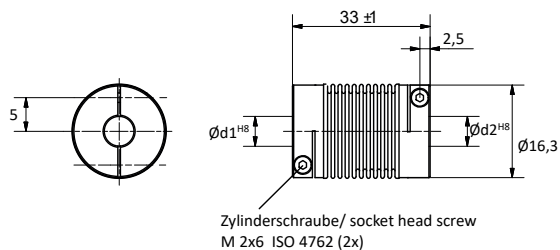

Bohrungskombinationen / bore combinations BKNK 1733				
d1 / d2	3	4	5	6
3	X	X	X	X
4		X	X	X
5			X	X
6				X
Bestellbeispiel / Example BKNK 1733 05/06				

BKNK 2537

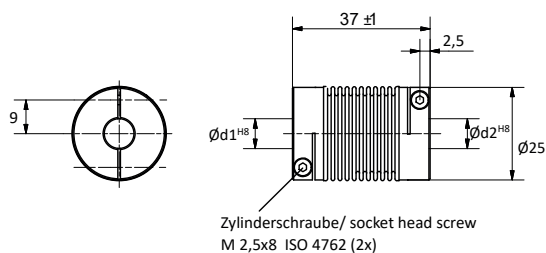

Bohrungskombinationen / bore combinations BKNK 2537				
d1 / d2	6	8	10	12
6	X	X	X	X
8		X	X	X
10			X	X
12				X
Bestellbeispiel / Example BKNK 2537 10/12				