




Anybus ProfiHub B5+

Item number: 17020R

For PROFIBUS network designs, the ProfiHub B5+ offers a reliable and robust backbone solution with robust message checking and selectable redundancy on communication and power supply.

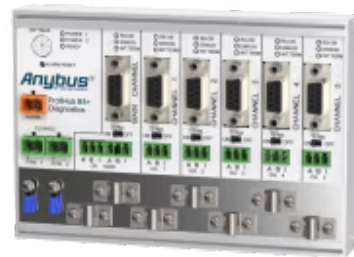

Efficient network segmentation with integrated diagnostics down to the last device

Features and benefits

- ✓ **Diagnostics slave device**
Capability to show diagnostic messages down to the last device with ComBricks
- ✓ **Compatible with different application speeds**
The repeater is transparent and handles a connection speed from 9.6Kbps to 12Mbps easily
- ✓ **Network segmentation**
Increase network reliability by creating isolated segmentations



General

Net Width (mm)	167 mm
Net Height (mm)	113 mm
Net Depth (mm)	35 mm
Net Weight (g)	660 g
Packed Width ERP (mm)	16 mm
Packed Height ERP (mm)	6 mm
Packed Depth ERP (mm)	26 mm
Packed Weight ERP (g)	664 g
Operating Temperature °C Min	-25
Operating Temperature °C Max	70
Current Consumption Type Value at Vcc Nom (mA)	275 mA
Current Consumption Max value at Vcc nom (mA)	275 mA
Input Voltage (V)	9...31 VDC
Power Wire Diameter (mm)	< 2.5 mm ²
Warranty (years)	1 Year

Identification & Status

Product ID	17020R
Country of Origin	Netherlands (the)
HS Code	8471800000
Export Control Classification Number (ECCN)	EAR99



Identification & Status

Supply Risk Factor ERP	Volume not defined yet
Purchasing Multiple ERP	10

Certifications & Standards

Protection Class IP	IP20
WEEE Category	IT and telecommunications equipment