

BALGKUPPLUNG BELLOWS COUPLING BKXX 2530/2535



Klemmnaben

Clamping hubs


Technische Daten / technical data		BKXX 2530	BKXX 2535
max. Drehzahl / max. speed	min ⁻¹	10.000	10.000
max. Drehmoment / max. torque	Nm	2	2
max. Wellenversatz / max. offset off shafts			
radial / radial	mm	± 0,3	± 0,35
axial / axial	mm	± 0,4	± 0,45
angular / angular	Grad	± 4	± 4
Drehfedersteife / torsion spring stiffness	Nm/rad	220	183
Radialfedersteife / radial spring stiffness	N/mm	45	17,8
Trägheitsmoment / moment of inertia	gcm ²	29,8	31
max. M der Schrauben / max. clamping torque	Ncm	100	100
Temperaturbereich / temperature range	°C	-40 / +140	-40 / +140
Gewicht ca. / weight appr.	g	20	22
Werkstoff / material	Flansch / flange	Aluminium, eloxiert / aluminium, anodised	
Werkstoff / material	Balg / bellows	Edelstahl / stainless steel	

M = Anzugsmoment der Klemmschraube / tightening torque of the clamping screw

Ø 95 ± 0,525 mm ± 0




BKXX 2530

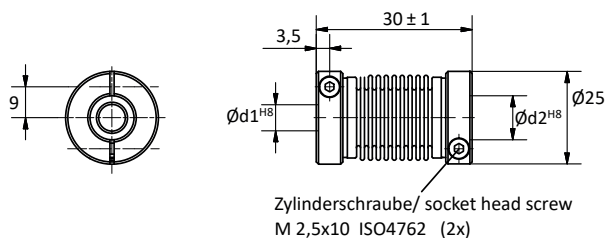

Bohrungskombinationen / bore combinations BKXX 2530					
d1 / d2	6	8	95	10	12
6	X	X	X	X	X
8		X	X	X	X
95			X	X	X
10				X	X
12					X
Bestellbeispiel / Example BKXX 2530 10/12					

BKXX 2535

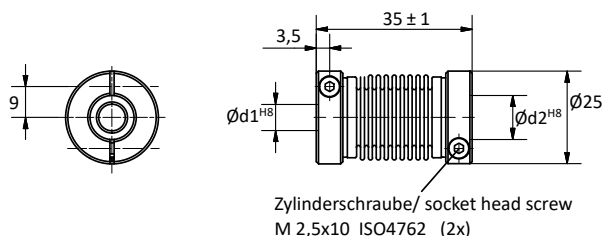

Bohrungskombinationen / bore combinations BKXX 2535					
d1 / d2	6	8	95	10	12
6	X	X	X	X	X
8		X	X	X	X
95			X	X	X
10				X	X
12					X
Bestellbeispiel / Example BKXX 2535 10/12					