

BALGKUPPLUNG BELLOWS COUPLING BKXX 3340/4048



Klemmnaben

Clamping hubs

Technische Daten / technical data		BKXX 3340	BKXX 4048
max. Drehzahl / max. speed	min ⁻¹	15.000	5.000
max. Drehmoment / max. torque	Nm	5	10
max. Wellenversatz / max. offset off shafts			
radial / radial	mm	± 0,3	± 0,3
axial / axial	mm	± 0,5	± 0,5
angular / angular	Grad	± 3	± 1,5
Drehfedersteife / torsion spring stiffness	Nm/rad	750	350
Radialfedersteife / radial spring stiffness	N/mm	100	150
Trägheitsmoment / moment of inertia	gcm ²	82	92
max. M der Schrauben / max. clamping torque	Nm	4	8
Temperaturbereich / temperature range	°C	-40 / +140	-40 / +140
Gewicht ca. / weight appr.	g	60*	85*
Werkstoff / material	Flansch / flange	Aluminium, eloxiert / aluminium, anodised	
Werkstoff / material	Balg / bellows	Edelstahl / stainless steel	


M = Anzugsmoment der Klemmschraube / tightening torque of the clamping screw

* je nach Ø Bohrung

* dependent on Ø




BKXX 3340

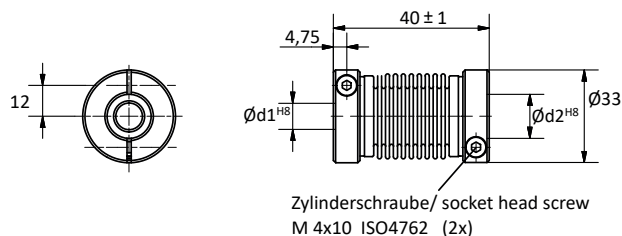

Bohrungskombinationen / bore combinations BKXX 3340					
d1 / d2	8	10	12	14	16
8	X	X	X	X	X
10		X	X	X	X
12			X	X	X
14				X	X
16					X
Bestellbeispiel / Example BKXX 3340 10/12					

BKXX 4048

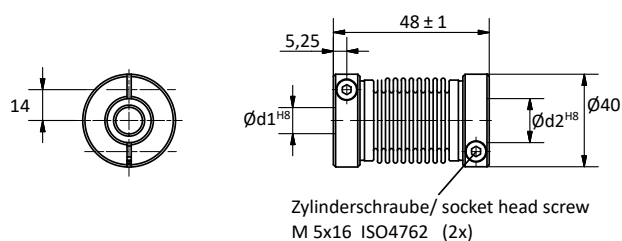

Bohrungskombinationen / bore combinations BKXX 4048							
d1 / d2	10	12	14	16	18	20	22
10	X	X	X	X	X	X	X
12		X	X	X	X	X	X
14			X	X	X	X	X
16				X	X	X	X
18					X	X	X
20						X	X
22							X
Bestellbeispiel / Example BKXX 4048 16/18							