


SCHWERLAST WENDELKUPPLUNG 2-GÄNGIG HEAVY DUTY HELIX COUPLING DOUBLE THREAD W2AS 2550



Klemmnaben


Clamping hubs

Technische Daten / technical data		W2AS 2550
max. Drehzahl / max. speed	min ⁻¹	8.000
max. Drehmoment / max. torque	Nm	3,5
max. Wellenversatz / max. offset off shafts		
radial / radial	mm	± 0,3
axial / axial	mm	± 1
angular / angular	Grad	± 30
Drehfedersteife / torsion spring stiffness	Nm/rad	10,5
Trägheitsmoment / moment of inertia	gcm ²	42,6
max. M der Schrauben / max. clamping torque	Ncm	120
Temperaturbereich / temperature range	°C	-30 / +150
Gewicht ca. / weight appr.	g	25
Werkstoff / material		Aluminium / aluminium

M = Anzugsmoment der Klemmschraube / tightening torque of the clamping screw



W2AS 2550

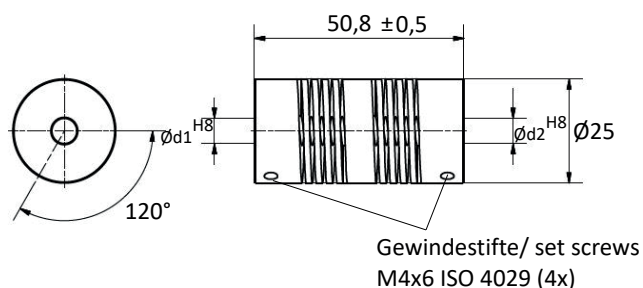

Bohrungskombinationen / bore combinations W2AS 2550				
d1 / d2	6	8	10	12
6	X	X	X	X
8		X	X	X
10			X	X
12				X
Bestellbeispiel / Example W2AS 2550 06/08				