



Industrial PC Solutions



Contents

ASEM CORPORATE

39 years of innovation Made in Italy	4
ASEM and the "Open Automation"	5
R&D	6
High tech and high quality manufacturing	7
«Open Automation», driving force of the Industry 4.0	8

INDUSTRIAL PC SOLUTIONS

Industrial PC & Monitor features	12
Custom Solutions	14
The ASEM Standards	15
Software solutions for the industrial automation	16
Product Portfolio	18

ARM based Panels

RT25	21
RT30 / RT31	22
RT35 <i>new</i>	24
RT40	26

Panel IPCs

HT2000	30
HT2150	32
HT2200	34
HT3000	36
HT3200	38
HT3400 / HT3600 <i>new</i>	40
HT5000	42

Book Mounting IPCs

BM40	46
BM100 <i>new</i>	48
BM2150	50
BM2200	52
BM3300 / BM3500 <i>new</i>	54
BM3400 / BM3600 <i>new</i>	56

Box IPCs

PB2000	60
PB2150	62
PB2200	64
PB3000 / PB3010	66
PB3200	68
PB3400 / PB3600 <i>new</i>	70
PB5000	72

Arm Mounting IPCs

VK3200	76
VPC2200	78

Rack IPCs

PR4047 / PR4147	82
PR4048 / PR4148	83
PR4049 / PR4149 <i>new</i>	84

Industrial Monitors

MH100 / MHR100	88
MK100 / MKR100	90

Configurations & Options

Front panels	94
Video remotation solutions	96
Fieldbuses boards	97
Configurable button area	98
Mechanical accessories	99

Technical support & Services	101
---	------------

ASEM designs and manufactures a wide range of Industrial PCs, HMI and PAC (Programmable Automation Controller) solutions based on x86 and ARM Cortex hardware platforms for the industrial automation market.


39 years of innovation **Made in Italy**

Since 1979, ASEM is a pioneer in the digital technology integrations between Information & Communication Technology and Industrial Automation.

The performance, configurability, robustness, design and the high number of software features of ASEM products and systems, are the result of 39 years of experience in designing and producing solutions for the

most demanding industrial applications. Exploring from the very beginning the potential of Open & Standard technologies into Factory Automation, and leveraging the first-class know-how

in developing hardware, firmware and software, ASEM has strengthened its leading position in Italy in the Industrial PCs, HMIs, remote assistance and control systems market.

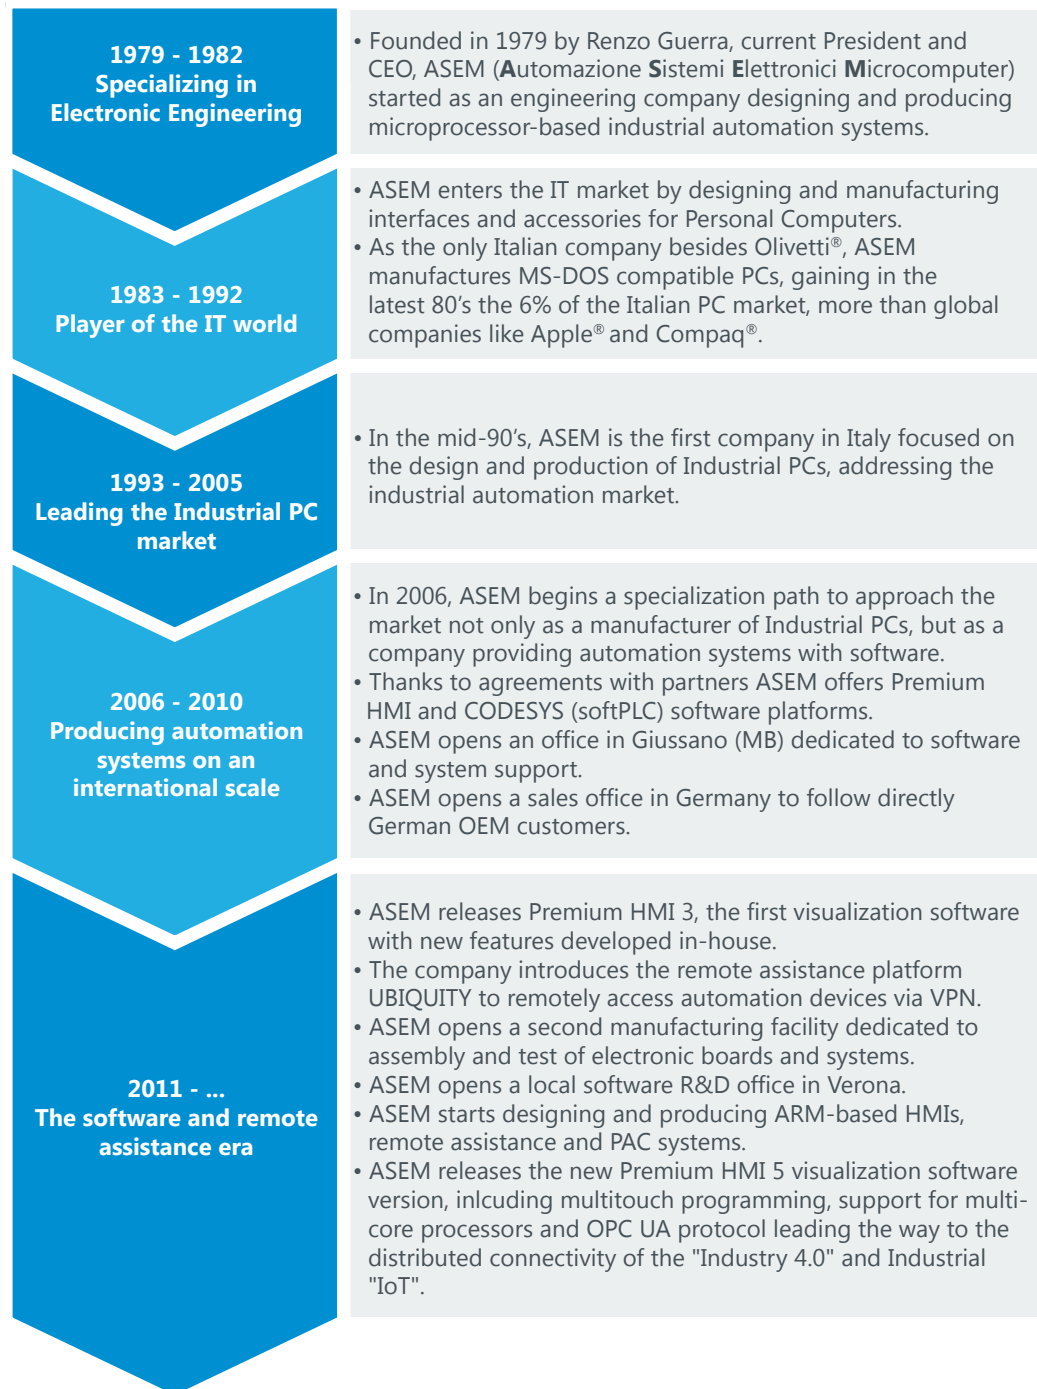

ASEM and the "Open Automation"



Over 25 years of experience in design and production of IPCs and 10 years of specialization in PC-based systems for machine and process automation.

Leading the "Open Automation" in Italy, ASEM is a reliable and professional partner able to guide customers through the evolution of HMI, control and remote assistance technology for the Industrial Automation market, developing and producing "Open & Standard" hardware platforms integrated with innovative, flexible and easy-to-use software. ASEM has its own complete hardware, firmware, software, mechanics and system design capability and manages internally all production phases, including board assembly and welding.

ASEM: entrepreneurship, investments, innovation
Thanks to a constant focus on innovation and quality, combined with investments in human resources, technology and manufacturing assets, ASEM is now one of the European emerging companies in the industrial automation market, providing systems and solutions that are entirely designed, engineered and produced in-house. The company has been committed to anticipate customers' needs, convinced that machine builders should leave proprietary technologies, to embrace "Open & Standard" platforms, focusing on software application development.

The deep knowledge of "x86" (PC) and "ARM" technologies and the investments in software design are in tune with the evolution of the industrial automation market needs. Market globalization and the economic crisis have forced machine builders to reduce costs and recover efficiency. At the same time end users (factories) modified their demand requiring price and delivery time reduction while increasing customization requests. Machine builders are then pushed to reduce development time and take an innovative approach using "Open & Standard" hardware platforms integrated with flexible and easy-to-use software development tools.

The integration of Information & Communication Technologies is now a need to produce automatic machines interconnected into a wider and more complex network where to exchange data and information. ASEM technological excellence is guaranteed by significant investments in R&D and continuous training of the entire workforce. The ability to understand and anticipate the fast market evolution, set and follow the right strategies, has enabled the company to maintain a steady growth momentum in the last 10 years.

ASEM in numbers:

- 2017 Revenues: 40,2 million Euros
- 187 employees
- 5.200 sqm Headquarters in Arteregna (UD)
- 3.250 sqm manufacturing facility in Arteregna (UD)
- R&D offices in Verona
- R&D offices in Giussano (MB)
- Sales offices in Germany

R&D

The seamless integration of hardware and software technologies is key to success


30% of ASEM human resources are dedicated to R&D. The team includes highly specialized engineers with complementary skills that cover all the electronic and mechanical design needs, as well as firmware and software development.

The close collaboration with leading technology trendsetters and the continuous dialogue with customers drive the specifications of hardware, firmware, software and systems engineering for each single product.

Thanks to the technological mastery of all system components and their perfect integration, ASEM designs performant, configurable, easy-to-use and reliable products for the most demanding industrial environments.

The different R&D teams work in synergy during the design process to ensure that hardware requirements and software features of each solution can be implemented in an integrated way.

The long experience and the high skills of the R&D engineers make ASEM a reliable technological partner to support machine builders and system integrators in the fast-changing industrial automation market.

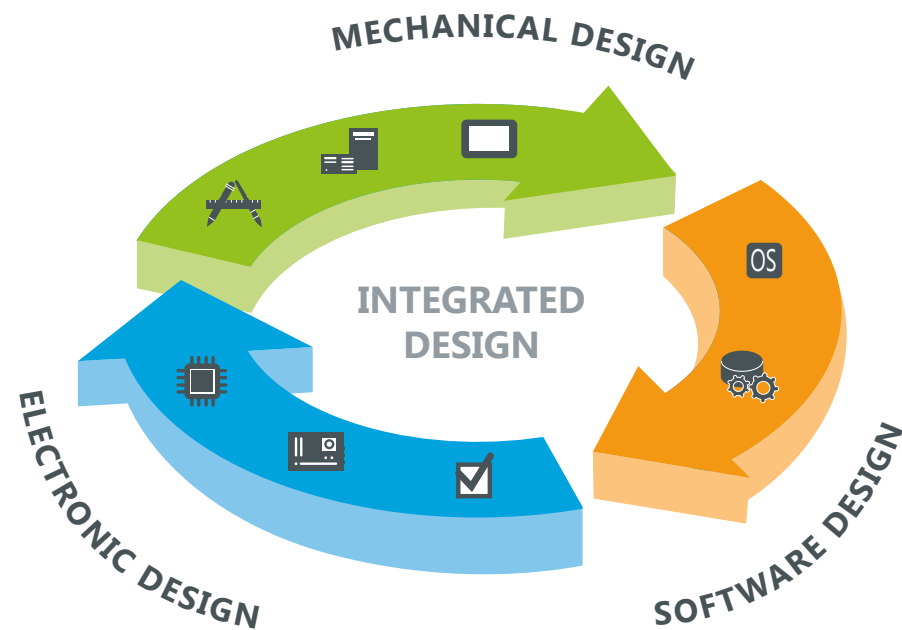

High tech & high quality manufacturing



ASEM manufacturing plants comprise two modern industrial facilities covering a total area of 8.500 sqm.

ASEM designs, engineers and manufactures electronic boards, products and systems internally. The decision to assemble electronic boards in its own Italian facility is in contrast with the industry trend to relocate electronics production activities in Eastern Europe and Far East, but the results in terms of quality and in terms of flexibility confirm the accuracy of the company's strategic decision, much appreciated by customers.

For the automatic assembly of boards, ASEM uses technologically advanced machinery, tools and equipment, such as precise and fast SMT Pick & Place positioners, selective soldering machines for "through hole" components, ovens reflow and X-ray inspection ensuring high quality and flexibility. The in-house assembly of electronic boards and a constant dialogue between operations' managers and the R&D engineers increase the sensitivity of electronics and mechanical designers towards production and test phases, with a consequent advantage of an increased reliability of the overall system.

The electronic components are supplied by the major global manufacturers and are specifically selected to ensure a long life cycle of products. Mechanical parts are purchased from European suppliers selected with rigorous qualification procedures. 100% of the electronic boards are subject to burn-in and functional tests for a minimum of 12 hours in special designed climatic chambers. 100% of the assembled systems are subjected to functional tests for 12 consecutive hours.

Continuity

The full control of design and production processes and the close cooperation with technology trendsetters allow ASEM to ensure a 7/10 years life cycle of its systems and reparability of the same for at least 5 further years, with availability of spare parts. ASEM guarantees End of Life procedures lasting from 6 to 12 months for the Last Buy Order and deliveries.



«Open Automation» driving force of the Industry 4.0




«Open & Standard» technologies integrated with flexible and user-friendly software solutions are leading the evolution to a digitalized industrial ecosystem, commonly known as "Industry 4.0". The industrial IoT (Internet of Things) and the growing number of distributed smart devices connected to the Internet, transform factories

in connected ecosystems in which sensors, automation devices, M2M («Machine to Machine») modules and software communicate and cooperate with each other and with humans in real time. These cyber-physical systems monitor physical processes, creating a virtual copy of the physical world enabling decentralized decision making.

This 4th Industrial Revolution is leading to a redesign of operations, services and Automation technologies providing the opportunity to significantly increase productivity, quality and flexibility of manufacturing systems.

Our vision

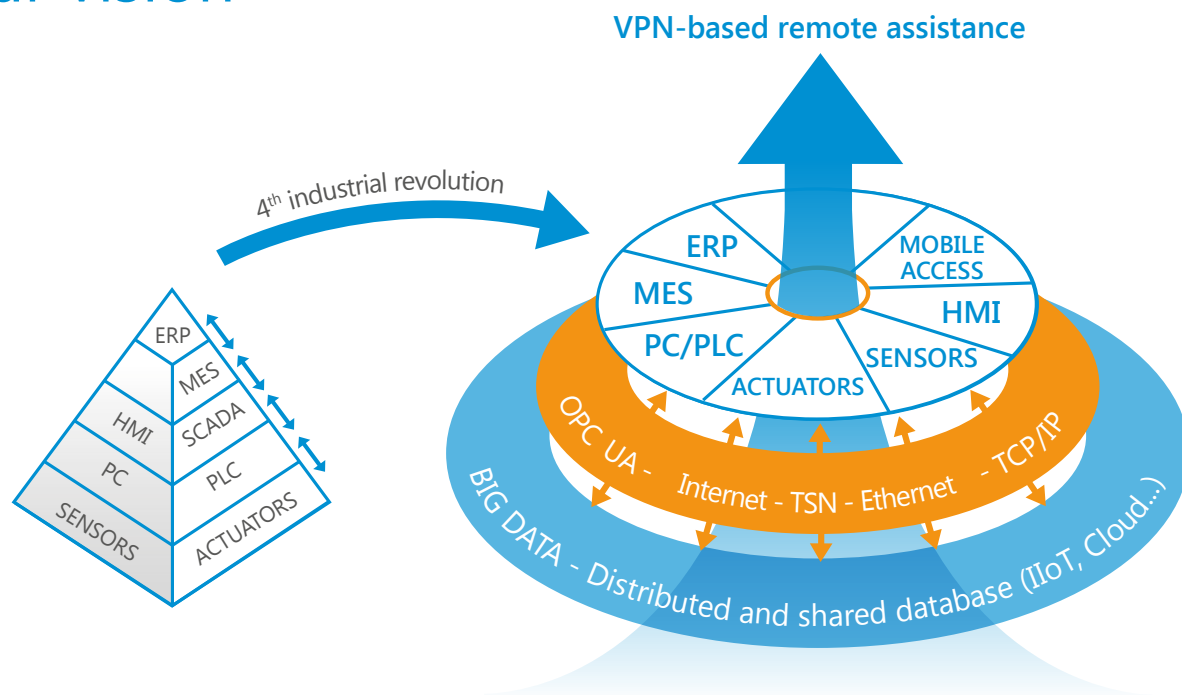

Designing UBIQUITY, an Internet-based software solution providing remote access to automated machines and plants, ASEM was one of the first companies understanding the value of Information and

Communication Technologies applied to the Automation. Nowadays ASEM is one of the few European companies mastering on its own all driver technologies of the current 4th Industrial Revolution covering

hardware development (x86, ARM platforms and OSs), and software, cloud and communication solutions design.

ASEM PC-based Automation

Open & Standard technologies for Industry 4.0

Flexibility and openness

- Use of Open & Standard ARM and x86 technologies integrated with flexible and user-friendly software development tools
- Flexibility in creating distributed automation architectures

Internet & Ethernet based communication

- Internet as a communication media among different plants, smart factories and devices
- Horizontal communication among automation devices based on Ethernet protocols
- Vertical integration among different automation and business management solutions (Enterprise Resource Planning, Manufacturing Execution Systems, etc.) by means of open, non-proprietary communication protocols (OPC UA)

Open & Standard communication protocols

- OPC UA (Unified Architecture) is a non-proprietary M2M communication protocol for interoperability among different automation and business management solutions
- TSN, Time Sensitive Networking is an extension of Ethernet IEEE 802.1 standard, designed to obtain real-time performances

Cyber Security

- Safety against threats and risks - physical integrity (hardware) and logical-functional (software) protection of the automation systems and content data

ASEM Software Solutions

An added value for every machine and plant

HMI technology & Mobile devices

- Design of ergonomical user interfaces, able to provide users with all necessary information for a correct management of the production plant
- Use of mobile devices giving access to the plant and production data over the web

Remote access technology: UBIQUITY VPN

- Remote access to the plant by means of a VPN
- IEC 62443-3 & German BSI certification for security of internet based industrial communication

IoT & Cloud technologies

- Ability of the automation systems to transfer information from sensors and field level to the cloud
- Information easily centralized and distributed
- The Cloud acts as a gateway for an open and global interoperability of the smart factories
- Potentially unlimited data analysis power for the development of preventive and predictive maintenance models

Logic & Motion Control Technology

- Reduced design times thanks to modular, flexible and object oriented development tools, supported by real-time simulations
- Scalable control logic performances based on the choice of the CPU

Data integration among different automation software solutions

Smart Factory: manufacturing becomes intelligent

Ability of the smart factories to adapt to changing operating conditions and to sudden planning changes

- Fast access to production data
- Continuous production data diagnosis and analysis to obtain indications and results
- More information available for machine/plant operators, support staff, production planners and management for a better business management
- Condition monitoring: continuous monitoring of the machine / plant conditions
- Power monitoring: consumption analysis and research for a higher efficiency

Industrial PC Solutions

ASEM IPCs
The only IPCs
with remote assistance
solution integrated



Industrial PC & Monitor features



More than 25 years of Industrial PCs

The "x86" (PC) and ARM Cortex platform technologies represent the evolution towards open and standard platforms, replacing systems based on proprietary technology. These "Open & Standard" technologies are driving the process of technological convergence and digital

integration between ICT (Information and Communications Technology) and Industrial Automation. Since the 80's ASEM has been designing x86 technology and since more than 20 years has been leading the "Open Automation" in Italy designing, engineering and manufacturing "Open & Standard" systems for the Industrial Automation market.



A complete product range

To satisfy different market needs, ASEM offers a wide range of industrial PCs including Panel IPCs with LCDs from 4.3" to 24" in 4:3

and Wide 16:9 aspect ratios, Arm Mounting IPCs with 15.6", 18.5", 21.5" and 24" Wide LCDs, Box IPCs with wall or DIN rail mounting and a complete range of Industrial

Panel Monitors with LCDs from 8.4" to 24" in 4:3 and 16:9 aspect ratios and Arm Mounting Monitors with LCDs from 15.6" to 24" in 16:9 aspect ratio.



Quality, reliability and performances

The mastery of hardware, firmware and system technologies and the long experience in mechanical design and engineering

have enabled ASEM to manufacture high quality and extremely reliable Industrial PCs and Monitors with strong attention to details and excellent value for money.

The expertise on heat dissipation methods has allowed ASEM to manufacture fanless systems integrating high performance and high power consumption quad core processors.



Chassis and Front Panels

Over the years, ASEM has gained considerable experience on materials and surface treatments to ensure electrical conductivity, shielding optimization and protection from external agents to its industrial PCs and monitors' chassis.

Chassis are made of galvanized steel or casted aluminium and are the result of an industrialization based on thermodynamic and fluid dynamic analysis aimed at a seamless integration of electronic boards and mechanical components. To meet the specific needs of food, chemical and pharmaceutical industries, some systems are designed and manufactured with stainless

steel frames and chassis. One of the most important details of Panel IPCs and Monitors are the front panels, designed to meet aesthetic, ergonomic and robustness requirements and at the same time ensure IP65 / IP66 protection degree, even with USB interfaces. The ASEM standards include four front panel variants for Panel IPCs and monitors: Aluminium with resistive

touchscreen, True Flat Aluminium with resistive touchscreen, Stainless Steel True Flat with resistive touchscreen and Aluminium True Flat with glass projected capacitive (P-CAP) Multi-touchscreen. The four front panels are available for Panel IPC families of the HT series, for MH and MHR panel monitor families and for future Panel IPC and monitor families.



Interchangeability and continuity

With a product life cycle of at least 7/10 years, ASEM designs Panel IPCs and monitors with the same cut-out (hole size needed for the installation) for each different LCD size to ensure interchangeability, without mechanical changes, among different families and compatibility with future families allowing to upgrade the Panel IPC or monitor even on machines on the field since many years.



UPS and Power Supply Systems

To prevent noise and overvoltage, IPCs and monitors' power supplies have galvanic isolation. Industrial PCs based on x86 processors have the option to integrate on the power supply unit the UPS (Uninterruptible Power Supply) function with an external battery pack. The ARM based systems can integrate the MicroUPS function with supercapacitors.



Motherboards

The IPC's motherboards have microprocessors included in Intel® embedded roadmap, with a long life cycle guaranteed by the manufacturer. ASEM motherboards use different platform technologies with scalable

performances, from entry-level processors in terms of price up to high performance dual and quad core processors, providing different expandability in terms of communication interfaces and expansion slots. Currently, ASEM portfolio includes the latest generation Intel® Apollo Lake™ platform, with dual and quad core Atom E39xx processors, the Intel® Bay Trail™ platform, with quad core J1900 Celeron processor, the 6th and 7th generation Intel® Core™ microprocessors Skylake™ H/U and Kaby

Lake™ series and ARM-based systems equipped with dual and quad core iMX6 processors. Motherboards are designed to provide "all-in-one" integration of every possible function (for instance the touchscreen controller) and minimize cables and connectors in order to make systems more resistant to possible vibrations and shocks in industrial environments. 100% of the motherboards are subject to burn-in and functional tests, for 12 consecutive hours, in

dedicated climate chambers. All motherboards feature the ASEM System Identity, a non-volatile storage for system identification data, as well as other useful customers' data for system traceability. One of the R&D teams is dedicated to BIOS and low level driver development for x86 platforms and to BSP (Board Support Package), boot loader and low-level drivers development for ARM Cortex platforms.



Operating Systems

Depending on microprocessor platform, ASEM ensures full compatibility of x86 systems with Win 32/64 Standard/ Embedded and Windows Embedded Compact 7 Pro operating systems and full

compatibility with the most popular Linux distributions. ARM Cortex A8 and A9 platforms support Windows Embedded Compact 7 Pro and Linux distributions assembled by ASEM. ASEM specialists can also

give support to implement a custom made image or develop customized embedded Win 32/64 and Linux images on specific customers request.



Fieldbuses

All x86 systems released by ASEM have the possibility to install fieldbuses (NETcore X)

boards, Master and Slave versions, that support the most spread industrial fieldbuses such as EtherCAT,

CANopen, Profibus, Profinet, MODBUS and EtherNet / IP.



Compatibility, testing and systems certification

All ASEM industrial PCs and ARM-based systems are optimized for the use of Premium HMI and UBIQUITY remote assistance software platforms. Most of the systems are also certified for the use

of CODESYS SoftPLC and SoftMotion platform, also for real-time applications. 100% of sold systems are subject to functional tests at room temperature for 12 consecutive hours, and sample systems are subjected to functional tests at temperature ranging from 0° C to 50° C for

12 consecutive hours. All ASEM products comply with EMC directives for emissions and immunity, the low voltage safety directive and the RoHS directive. Most of the products and systems comply with UL norms and specific products comply with the ATEX norms.

Custom Solutions

The complete control of hardware, firmware and software technologies allows ASEM to realize custom systems for specific customer needs.



Light custom Solutions

Custom-light services provide different levels of customization of ASEM standard products:

Aesthetic light custom, such as:
 → removal or substitution of the ASEM trademark with a label showing the brand and/or logo of the customer;
 → customization of front film with silkscreen printing of client brands and/or logotype;

Mechanical light custom, such as:
 → personalization of the shape and / or thickness of the front panel;
 → Customization of the layout of the keyboard on the front panel;

Electronic light custom, such as:
 → addition of communication interfaces and / or modification of the standard configuration.

The customizations described do not involve any structural changes to standard products and meet the typical needs of OEMs and System Integrators who want to offer their own solutions to the market with a homogeneous representation of the brand. Custom-light solutions can be made in a relatively short time and low volume production.



Full custom solutions

Custom-full services include the creation of new platforms and solutions based on customer specifications. ASEM does not normally sell the intellectual property of custom projects, as their realization is solely dedicated to ASEM serial production. Custom full services include the following development activities:

Mechanical custom-full, such as:
 → creation of a new mechanical solution, also with plastic parts, that uses existing electronic cards and/or motherboards;

Electronic custom full, such as:
 → development of new motherboards and/or electronic cards;

Complete custom-full, such as:
 → development of a new system or solution that includes the design of mechanical components as well as electronic boards.

The ASEM Standards

ASEM has set the electronic and mechanical design standards for Panel IPC, Box IPC and Monitor families to guarantee maximum flexibility, higher safety and continuity to customers.




A unique cut-out for each different size of LCD to ensure:

→ Interchangeability among different families of Panel IPCs and Monitors
 → Mechanical compatibility with future families



Front panel available in four different variants

→ Aluminium with USB port
 → True Flat Aluminium with USB port
 → Stainless Steel True Flat
 → True Flat Aluminium with glass projected capacitive Multitouch screen




Power supply with galvanic isolation

To prevent:
 → Common mode noise at low/medium frequencies on the power supply line
 → Ground loop noise
 → Extra-voltage caused by lightning
 And guarantee:
 → Power supply with grounded positive terminal (e.g. Japan)



Power supply with integrated UPS (uninterruptible power supply)

→ With external battery pack on the back of the system
 → With external standalone wall mounting battery pack



ASEM system identity

→ Non-volatile memory for system identification data storage

Four variants of the front panel



Aluminium with USB

True Flat Aluminium with USB port

Stainless Steel True Flat

Aluminium P-CAP Multitouch

Software solutions for the industrial automation

Remote Assistance: UBIQUITY



In 2011 ASEM presented UBIQUITY, the innovative software platform for remote assistance. Designed for machine builders, the remote assistance solution UBIQUITY enables access to remote systems and their sub-networks as if they were connected with a cable. The software solution UBIQUITY enables the access to remote supervision and control systems and to the automation devices (PLC,

drive, etc), connected to the Ethernet and Serial subnetworks of the IPC/operator terminal/controller, through a VPN (Virtual Private Network) based on proprietary technology optimized for industrial communication. UBIQUITY does not require additional hardware and allows to operate in remote plants as if they were directly connected to your enterprise network.

It enables technical support teams to solve any issue, eliminating the need for on-site assistance, dramatically reducing post-sale service costs. This solution is particularly useful during machine setup and commissioning, to monitor remote applications, to modify and update software applications and remotely debug PLCs and other automation devices.



Starting from March 2016, UBIQUITY is installed on all ASEM IPCs, enhancing the value of every IPC with an integrated remote assistance solution.

Industrial IoT: UNIQLCLOUD



UNIQLCLOUD is the software solution specifically designed to securely publish relevant field data on

cloud databases for later analysis. UNIQLCLOUD comes as an optional service of the ASEM HMI software

platform to easily extend the datalogging capabilities by easily interfacing with the cloud storage technology

aiming to provide a secure and effective solution to the modern IIoT and Industry 4.0 application scenarios.

Visualization: Premium HMI and PHMI Mobile



With Premium HMI software platform, ASEM has been providing valuable visualization systems appreciated for the quantity and quality of the functionalities available and the transversality of the platform, which makes it possible to use the same project both on HMI

solutions based on ARM or x86 hardware platforms (also with multicore architecture support), with WinCE or Win 32/64 Runtimes without any need to modify or change settings in the 'Premium HMI Studio' development tool.

Multitouch and OPC UA Premium HMI 5 supports Multitouch programming for Win 32/64 and WEC 7 systems with multicore processors and supports OPC UA protocol, leading the way to the distributed connectivity of the "Industry 4.0" and Industrial "IoT".

Premium HMI Mobile is the App to view and interact with Premium HMI projects, via mobile devices (iOS and Android) connected to the enterprise Wi-Fi network. The new app provides mobile and multitouch support to the HMI project running on Machine Operator Panels/ Panel IPCs.

Control: CODESYS



ASEM Programmable Automation Controllers base their PLC functionalities on the consolidated and widespread CODESYS SoftPLC of the German 3S, with a highly

efficient implementation of version 3.5 which guarantees the deterministic execution of PLC control logic with WinCE and Win 32/64 operating systems.

CODESYS let the projects to be transferred between various operating systems and hardware platforms without the need to change the project code.

Product Portfolio

1. ARM based Panels

The ARM based Panels, with Cortex A8 and A9 processors, are available with Microsoft Windows Embedded Compact 7 Pro or Linux operating systems. They include a wide range of 16 million colours TFT LED Backlight LCD screens, from 4.3" up to 15.6" with resistive touchscreens and Aluminium/True Flat Aluminium front Panels and True Flat Aluminium with glass projected capacitive Multitouch screen.

RT25	RT30/31	RT35 new	RT40
 p. 21	 p. 22	 p. 24	 p. 26

2. Panel IPCs

ASEM Panel IPCs are based on Atom, Celeron and Core™ i3, i5, i7 dual and quad core processors. Available with TFT LCDs from 6.5" to 24" and Aluminium, True Flat Aluminium, Stainless Steel True Flat and True Flat Glass & Aluminium Multitouch screens.

HT2000	HT2150	HT2200	
 p. 30	 p. 32	 p. 34	
HT3000	HT3200	HT3400 / HT3600 new	HT5000
 p. 36	 p. 38	 p. 40	 p. 42

3. Book Mounting IPCs

ASEM recently completed its Box IPC portfolio with a complete range of book mounting systems, combining performances, design, ergonomics and configurability. Based on ARM Cortex A9 or Intel® Apollo Lake™, Bay Trail™, Skylake™ and Kaby Lake™ platforms, they are supplied with a sturdy aluminium or plastic chassis, highly refined in every aesthetic and ergonomic detail.

BM40	BM100 new	BM2150	BM2200	BM3300 / BM3500 new	BM3400 / BM3600 new
 p. 46	 p. 48	 p. 50	 p. 52	 p. 54	 p. 56

4. Box IPCs

ASEM provides a full range of Box IPCs based on Atom, Celeron, Core™ i3, i5, i7 dual and quad core processors and they are suitable for wall or DIN rail mounting.

PB2000	PB2150	PB2200	
 p. 60	 p. 62	 p. 64	
PB3000 / PB3010	PB3200	PB3400 / PB3600 new	PB5000
 p. 66	 p. 68	 p. 70	 p. 72

5. Arm Mounting IPCs

The Arm Mounting IPCs are compact, fanless, ergonomic and easy to install systems with a stylish design, that are easy to install and compatible with the most common mounting standards.

Based on Intel® Bay Trail™ platform with 15" TFT LCD or Intel® Broadwell™ platform available with 15.6", 18.5", 21.5" and 24" TFT LED Backlight LCDs in a Full IP65 aluminium chassis.

VK3200	VPC2200
 p. 76	 p. 78

6. Rack IPCs

19" 4U rack solutions with a wide range of configurations, motherboards, expansion slots and Intel® Core™ i3, i5, i7, dual and quad core processors up to Intel® Kaby Lake™ platform.

PR4047 / PR4147	PR4048 / PR4148	PR4049 / PR4149 new
 p. 82	 p. 83	 p. 84

7. Industrial Monitors

The panel Industrial Monitors are available with LCDs from 8.4" to 24", with 4:3, 5:4 or Wide format, and four front panel variants. Arm Mounting Monitors are compact, fanless, ergonomic and easy to install solutions, compatible with the most common mounting standards and are available with 15.6", 18.5", 21.5" and 24" TFT LCDs in a full IP65 aluminium chassis.

MHR100 and MKR100 versions integrate the remotation technology for digital video and USB 2.0 signal up to 100 m with a Cat 5e SF/UTP or Cat 6A S/FTP cable.

MH100 / MHR100	MK100 / MKR100
 p. 88	 p. 90

ARM based Panels

The ARM based Panels, with Cortex A8 and A9 processors, are available with Microsoft Windows Embedded Compact 7 Pro or Linux operating systems.

They include a wide range of 16 million colours TFT LED Backlight LCD screens, from 4.3" up to 15.6" with resistive touchscreens and Aluminium or True Flat Aluminium front Panels and True Flat Aluminium with glass projected capacitive Multitouch screen.



RT25

Entry level ARM based panel IPCs



The ARM based Panel IPCs of the RT25 family have the smallest LCD sizes of the ASEM portfolio. They are based on the ARM Cortex A8 (i.MX535) 1GHz processor. The "all in one" motherboard provides one Ethernet 100Mbps port, one

USB 2.0 port, one serial RS232/422/485 interface with rear access, 1 GB DDR3 RAM, 256MB Nand-Flash for the operating system and 4GB pseudo-SLC eMMC memory to save and manage application and project data.

The RT25 family is available with 16 million colours LED Backlight TFT LCDs, 4.3" and 7" in Wide aspect ratio, with Aluminium or Aluminium True flat front panels and 4 wires resistive touchscreen. RT25 systems have a 24 VDC power supply input.



+ Highlights

- "All in one" motherboard
- Microsoft Windows Embedded Compact 7 Pro or Linux Yocto operating system
- ARM Cortex A8 processor (i.MX535)
- Fanless ARM based panel IPC with 0°C÷50°C operating temperature
- 4.3" and 7" LCDs in Wide aspect ratio
- 24 VDC power supply input
- CE, cULus LISTED (508) certifications

RT30 / RT31

ARM Cortex A8 based panel IPC



The ARM based Panel IPC family RT30/31 is based on the ARM Cortex A8 1GHz/800MHz processor (i.MX535/i.MX537). The "all in one" motherboard provides one Ethernet 10/100Mbps port, one Ethernet 100Mbps port, two USB 2.0 ports, one serial RS232/422/485 interface with rear access, 1 GB DDR3 RAM, 256MB Nand-Flash for the operating system and the

runtimes, 4GB pseudo-SLC eMMC memory to save and manage application and project data and a removable SDHC memory slot. The RT30/31 family is available with 16 million colours LED Backlight TFT LCDs from 5.7" to 15.6", in 4:3 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels and 4 or 5 wires resistive touchscreen. All version with Wide LCDs are

also available with aluminium and glass TrueFlat Capacitive front panels, with projected capacitive touchscreen. RT30/31 systems have a 24 VDC power supply input and optionally an integrated MicroUPS based on supercapacitors. RT31 versions have an additional CAN interface and isolated power supply.



+ Highlights

- "All in one" motherboard
- Microsoft Windows Embedded Compact 7 Pro or Linux Yocto operating system
- ARM Cortex A8 processor (i.MX535/i.MX537)
- Fanless ARM based panel IPC with 0°C+50°C operating temperature
- 5.7", 8.4", 10.4", 12.1" and 15" LCDs in 4:3 aspect ratio, 7", 10.1", 12.1" and 15.6" LCDs in Wide aspect ratio
- 24 VDC power supply input (isolated on RT31)
- Integrated MicroUPS with supercapacitors (optional)
- RT31 version with additional CAN interface
- CE, cULus LISTED (508) certifications
- ATEX area 2/22 certification (only for RT30)

Technical Data

	RT25	RT25-TF	RT30	RT30-TF	RT30-TFC	RT31	RT31-TF	RT31-TFC	
OS AVAILABLE	Microsoft Windows Embedded Compact 7 Pro with Datalight Reliance Nitro file system								
	Embedded Linux distribution based on Yocto Project								
	No OS								
LED backlight TFT LCD	4.3" W - 480x272 7" W - 800x480		5.7" - 640x480 7" W - 800x480 8.4" - 800x600 10.1" W - 1280x800 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768		7" W - 800x480 10.1" W - 1280x800 12.1" W - 1280x800 15.6" W - 1366x768		7" W - 800x480 8.4" - 800x600 10.4" - 800x600 10.1" W - 1280x800 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768		7" W - 800x480 10.1" W - 1280x800 12.1" W - 1280x800 15.6" W - 1366x768
TOUCHSCREEN	Resistive 4 wires		Resistive 4 wires for 5.7" and 7" Resistive 5 wires for other sizes		P-CAP Projective Capacitive	Resistive 4 wires for 5.7" and 7" Resistive 5 wires for other sizes		P-CAP Projective Capacitive	
FRONT PANEL	Aluminium	True Flat Aluminium	Aluminium	True Flat Aluminium		Aluminium	True Flat Aluminium		
PROTECTION GRADE	IP66, Enclosure type 4x - frontal								
PROCESSOR	ARM Cortex A8 processor i.MX535 1 GHz					ARM Cortex A8 processor i.MX537 800 MHz			
SYSTEM MEMORY - RAM	1 GB with DDR3 soldered								
MASS STORAGE	256 MB Read-Only NAND-Flash for operating system and runtime								
	4 GB eMMC pseudo-SLC, file system organization for projects and applications								
LAN	LAN1 Ethernet 100 Mbps (RJ45)		1 x Slot SD/SDHC v2.0						
USB	1 x USB 2.0 rear (Type-A)		LAN1 Ethernet 100 Mbps (RJ45) LAN2 Ethernet 10/100 Mbps (RJ45)						
SERIAL	2 x USB 2.0 rear (Type-A)								
FIELDBUS	1 x RS-232/422/485 (DB15M)						1 x CAN isolated channel (DB9M) with FlexCAN integrated controller		
POWER SUPPLY INPUT	24VDC (18 ÷ 36VDC)					24VDC (18 ÷ 36VDC) isolated			
OPERATING TEMPERATURE	Backup for microinterruption, max 500ms, with supercapacitors (optional)								
APPROVALS	CE, cULus LISTED (508)		CE, cULus LISTED (508), ATEX zone 22, II 3 D		CE, cULus LISTED (508), ATEX zone 2/22, II 3 G D		CE, cULus LISTED (508)		

RT35 [new]

ARM multicore based panel IPC



The ARM based Panel IPC family RT35 is based on the ARM Cortex A9 1GHz multicore processor (i.MX6 DualLite). The "all in one" motherboard provides one Ethernet 10/100/1000Mbps port, one USB 2.0 port and a serial RS232/422/485 interface

with rear access, 1 GB DDR3 RAM, 4GB Pseudo-SLC eMMC memory. The RT35 family is available with 16 million color LED Backlight TFT LCDs from 7" to 12.1", in 4:3 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels and 4 or 5 wires

resistive touchscreen. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. RT35 systems have an isolated 24 VDC power supply input.



+ Highlights

- "All in one" motherboard
- Microsoft Windows Embedded Compact 7 Pro or Linux Yocto operating system
- ARM Cortex A9 dual core processor (i.MX6 DualLite)
- Fanless ARM based panel IPC with 0°C ÷ 50°C operating temperature
- 8.4", 10.4" and 12.1" LCDs in 4:3 aspect ratio, 7", 10.1" and 12.1" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- CE, cULus LISTED (61010) certifications

Gallery



Technical data

	RT35	RT35-TF	RT35-TFM
O.S. AVAILABLE	Windows Embedded Compact 7 Pro with Datalight Reliance Nitro file system Embedded Linux distribution based on Yocto Project No OS		
PROCESSOR	ARM Cortex A9 1GHz i.MX6 DualLite		
SYSTEM MEMORY - RAM	1 GB DDR3 soldered on board		
MASS STORAGE	4 GB eMMC pseudo-SLC		
LED backlight TFT LCD	7" W - 800x480 8.4" - 800x600 10.1" W - 1280x800 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W- 1280x800		7" W - 800x480 10.1" W - 1280x800 12.1" W- 1280x800
TOUCHSCREEN	Resistive 4 / 5 wires		P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	
PROTECTION DEGREE	IP66, Enclosure type 4x - front		
INTERFACES	1 x LAN 10/100/1000 Mbps (RJ45) 1 x USB 2.0 rear (Type-A) 1 x RS232/422/485 (DB9M)		
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated		
OPERATING TEMPERATURE	0°C ÷ 50°C		
APPROVALS	CE, cULus LISTED (61010) pending		

RT40

ARM Cortex A9 multicore based panel IPC



The ARM based Panel IPC family RT40 and its ET versions with extended temperature range are based on the ARM Cortex A9 1GHz multicore processor (i.MX6 DualLite). The "all in one" motherboard provides two Ethernet 10/100/1000Mbps ports, two USB 2.0 ports, a serial RS232/422/485 interface

with rear access, 1 GB DDR3 RAM, 4GB Pseudo-SLC eMMC memory and a slot for a removable MicroSD with rear access. Optionally, an additional RS485 or CAN serial port is available. The RT40 family is available with 16 million colours LED Backlight TFT LCDs from 7" to 15.6", in 4:3 and Wide

aspect ratio, with Aluminium or Aluminium True flat front panels and 4 or 5 wires resistive touchscreen. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. RT40 systems have an isolated 24 VDC power supply input.



Highlights

- "All in one" motherboard
- Microsoft Windows Embedded Compact 7 Pro or Linux Yocto operating system
- ARM Cortex A9 dual core processor (i.MX6 DualLite)
- Fanless ARM based panel IPC with 0°C ÷ 50°C operating temperature
- 8.4", 10.4", 12.1" and 15" LCDs in 4:3 aspect ratio, 7", 10.1", 12.1" and 15.6" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- CE, cULus LISTED (61010) certifications
- ATEX area 2/22 certification

Gallery



Technical data

	RT40 / RT40 ET	RT40-TF / RT40-TF ET	RT40-TFM / RT40-TFM ET
O.S. AVAILABLE	Windows Embedded Compact 7 Pro with Datalight Reliance Nitro file system Embedded Linux distribution based on Yocto Project No OS		
PROCESSOR	ARM Cortex A9 1GHz i.MX6 DualLite		
SYSTEM MEMORY - RAM	1 GB DDR3 soldered		
MASS STORAGE	4 GB eMMC Pseudo-SLC 1x microSD slot onboard with external access		
LED backlight TFT LCD	7" W - 800x480 8.4" - 800x600 10.1" W - 1280x800 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768		7" W - 800x480 10.1" W - 1280x800 12.1" W - 1280x800 15.6" W - 1366x768
TOUCHSCREEN	Resistive 4 / 5 wires		P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	True Flat Aluminium
PROTECTION DEGREE	IP66, Enclosure type 4x - frontal		
INTERFACES	2 x LAN 10/100/1000 Mbps (RJ45) 2 x USB 2.0 rear (Type-A) 1 x RS232/422/485 (DB15M) 1 x RS485 isolated (DB9M) with terminations (optional) 1 x CAN isolated channel (DB9M) and terminations (optional) 1 x Wireless/Modem adapter (optional)		
POWER SUPPLY INPUT	24VDC (18 ÷ 36VDC) isolated		
OPERATING TEMPERATURE	0°C ÷ 50°C		
ET version	-10° ÷ 60°C		
APPROVALS	CE, cULus LISTED (61010), ATEX zone 22, II 3 D	CE, cULus LISTED (61010), ATEX zone 2/22, II 3 G D	
ET version	CE, cULus LISTED (61010) pending		

Panel IPCs

ASEM Panel IPCs are low consumption and high computing performance systems, with or without fans, based on Atom, Celeron and Core™ i3, i5, i7 dual and quad core processors. Available with TFT LCDs from 6.5" to 24" and Aluminium, True Flat Aluminium, Stainless Steel True Flat with resistive touchscreens and Aluminium/True Flat Aluminium front Panels and True Flat Aluminium with glass projected capacitive Multitouch screen.



HT2000

Intel® Cedar Trail™ based fanless panel IPCs



The fanless Panel IPC family HT2000 is based on the Atom™ D2550 1,86GHz dual core processor of the Intel® Cedar Trail™ platform. The "all in one" motherboard provides two Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, four USB 2.0 ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output and a SATA II CFAST slot with external rear access, one SATA II connector for the installation of 2.5" HDD/

SSD, up to 4 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial or USB interfaces. The HT2000 family is available with 16 million colours LED Backlight TFT LCDs from 10.4" to 21.5", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 12.1", 15", 17" and 19" LCD can have a Stainless Steel

True Flat front panel. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. HT2000 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x1 slot.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- Intel® Cedar Trail™ platform
- Fanless panel IPC with 0°C÷50°C operating temperature
- 10.4", 12.1" and 15" LCDs in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 15.6", 18.5" and 21.5" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- S1 version with one PCI or PCIe x1 expansion slot
- CE, cULus LISTED (508) certifications

Gallery




Technical data

	HT2000	HT2000-TF	HT2000-TFX	HT2000-TFM
LED backlight TFT LCD	10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 15.6" W - 1366x768 17" - 1280x1024 18.5" W - 1366x768 19" - 1280x1024 21.5" W - 1920x1080		12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	15.6" W - 1366x768 18.5" W - 1366x768 21.5" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium
PROTECTION GRADE	IP66 - frontal			
PROCESSOR	Intel® Atom™ D2550 1,86 GHz, 2 cores / 4 threads, 1MB L2 cache, soldered			
CHIPSET	Intel® NM10			
VIDEO CONTROLLER	GMA3650 Integrated in Intel® Atom™ microprocessor, 640MHz, LVDS 8bit/colour digital interface			
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB (1 x SODIMM DDR3 module)			
MASS STORAGE	1 bootable CFAST SATA II slot onboard with external access 1 x onboard connector for 2.5" SSD/HDD SATA II with installation kit 1 x PS/2 for keyboard or mouse			
LAN	2 x LAN 10/100/1000Mbps (2 x Intel® 82574L)			
PS/2	1 x PS/2 for keyboard or mouse			
USB	4 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		4 x USB 2.0 rear (Type-A)	
SERIAL	1 x RS232 (DB9M)			
VIDEO OUTPUT	1 x VGA or 1 x DVI-I (DVI-D + VGA)			
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)			
EXPANSION SLOTS S0	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards			
S1	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 1 x PCI or 1 x PCIe x1 (2.5 Gb/s)			
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack			
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32 bit, Windows XP Pro 32 bit, Microsoft Windows Embedded Standard 7E/7P 32 bit, Windows Embedded Standard 2009 (XPe SP3) 32 bit, Microsoft Windows Embedded Compact 7 Pro			
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD			
APPROVALS	CE, cULus LISTED (508)			

HT2150

Entry level Intel® Bay Trail™ based fanless panel IPCs

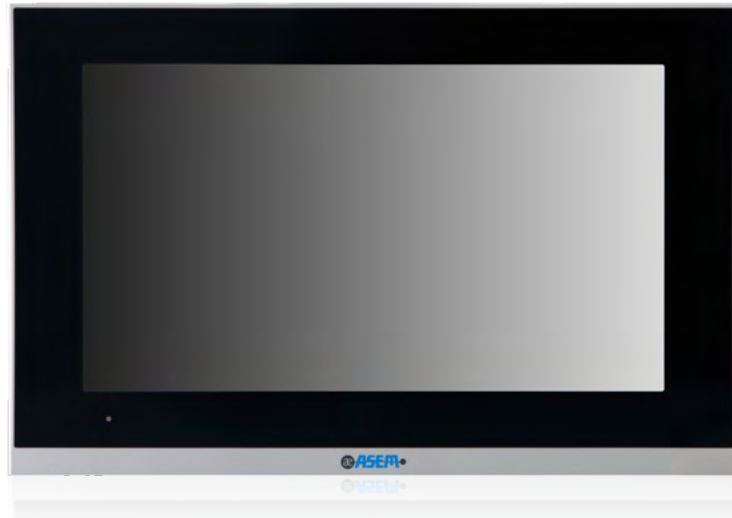

The fanless Panel IPC family HT2150 is an entry-level solution, available with small LCD sizes, that offers an excellent performance/price ratio. It is based on the Celeron J1900 2GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. The "all in one" motherboard provides two Ethernet

10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, a USB 3.0 port, a USB 2.0 port and a SATA II CFAST slot with rear external access, an mSATA connector for SATA II SSD, up to 8 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial or USB interfaces.

The HT2150 family is available with 16 million colours LED Backlight TFT LCDs from 6.5" to 15.6", in 4:3 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch

front panels, with projected capacitive touchscreen. HT2150 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the SL with a reduced depth and the S0 with the possibility to install additional interfaces.



Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Support to 32 or 64 bit operating systems
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless panel IPC with 0°C ÷ 50°C operating temperature
- 6.5", 8.4", 10.4", 12.1" and 15" LCDs in 4:3 aspect ratio, 7", 10.1", 12.1" and 15.6" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- SL version with reduced depth
- CE, cULus LISTED (61010) certifications


Gallery



Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 1/2 x USB 2.0
- 1 x LAN Gigabit + 1 x USB 2.0
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem

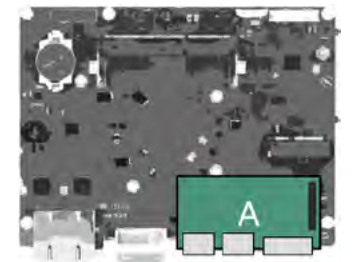

Technical data

	HT2150	HT2150-TF	HT2150-TFM
LED backlight TFT LCD	6.5" - 640x480 7" W - 800x480 8.4" - 800x600 10.1" W - 1280x800 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768		7" W - 800x480 10.1" W - 1280x800 12.1" W - 1280x800 15.6" W - 1366x768
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	
PROTECTION GRADE	IP66 - frontal		
PROCESSOR	Intel® Celeron J1900 2.0Ghz, 4 cores / 4 threads, 2MB L2 cache, soldered		
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface		
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)		
MASS STORAGE	1 bootable CFAST SATA II slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA II		
LAN	2 x LAN 10/100/1000Mbps (RJ45 - 2 x Intel® I210)		
USB	1 x USB 3.0 rear (Type-A) 1 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		1 x USB 3.0 rear (Type-A) 1 x USB 2.0 rear (Type-A)
ADD-ON INTERFACES (only for S0, max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 1 x USB 2.0 (Type-A) 2 x USB 2.0 (Type -A) 1 x LAN 10/100/1000Mbps (RJ45 - Intel® I210) + 1 x USB 2.0 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter		
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional for S0)		
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit		
OPERATING TEMPERATURE	0°C ÷ 50°C		
APPROVALS	CE, cULus LISTED (61010)		

HT2200

Intel® Bay Trail™ based fanless panel IPCs



The fanless Panel IPC family HT2200 is based on the Celeron J1900 2GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. The "all in one" motherboard provides two Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, one USB 3.0 port, two USB 2.0 ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output and a SATA II CFast slot with rear external access, an mSATA connector for SATA II

SSD, one SATA II connector for the installation of 2.5" HDD/SSD, up to 8 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial or USB interfaces. The HT2200 family is available with 16 million colours LED Backlight TFT LCDs from 10.1" to 24", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 12.1", 15", 17" and 19" LCD can have a Stainless


Steel True Flat front panel. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. HT2200 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in three versions, the SL with a reduced depth, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x1 slot.



Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Support to 32 or 64 bit operating systems
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless panel IPC with 0°C÷50°C operating temperature
- 10.4", 12.1" and 15" LCDs in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 10.1", 12.1", 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- Onboard connector for NETcore X fieldbus boards
- SL version with reduced depth
- S1 version with one PCI or PCIe x1 expansion slot
- CE, cULus LISTED (508) certifications

Gallery

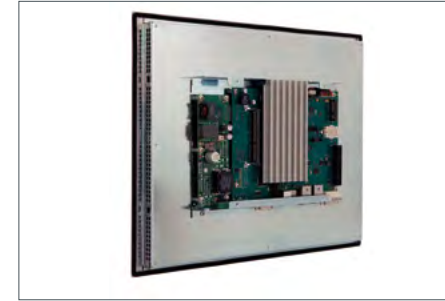


Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0

Position B

- 1 x LAN Gigabit
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem



Technical data

	HT2200	HT2200-TF	HT2200-TFX	HT2200-TFM
LED backlight TFT LCD	10.1" W - 1280x800 (SL) 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080		12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	10.1" W - 1280x800 (SL) 12.1" W - 1280x800 15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium
PROTECTION GRADE	IP66 - frontal			
PROCESSOR	Intel® Celeron J1900 2.00Ghz (2.42Ghz Burst) a 64 bit, 4 cores / 4 threads, 2MB L2 cache, soldered			
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface			
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)			
MASS STORAGE SL/S0/S1	1 x bootable CFast SATA II slot on board with external access 1 x onboard connector for direct insertion of mSATA SSD SATA II			
S0/S1	1 x bootable CFast SATA II slot on board with external access 1 x onboard connector for 2.5" SSD/HDD 24x7 SATA II with internal installation kit (HT2200 S0/S1)			
LAN	2 x LAN 10/100/1000Mbps (RJ45 - 2 x Intel® I210)			
USB	1 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		1 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A)	
SERIAL	1 x RS232 (DB9M)			
VIDEO OUTPUT	1 x DVI-I (DVI-D + VGA with adapter)			
ADD-ON INTERFACES (only for S0/S1)	1 x RS232/422/485 (DB15M)+ 1 x USB 2.0 (Type-A)			
Position A (max 1)	1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A)			
	2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)			
Position B (max 1)	1 x LAN 10/100/1000Mbps (RJ45 - Intel® I210)			
	1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter			
EXPANSION SLOTS S1	1 x PCI			
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)			
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit			
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD			
APPROVALS	CE, cULus LISTED (508)			

HT3000

Intel® Ivy Bridge™ based fanless panel IPCs



The fanless Panel IPC family HT3000 is based on the third generation Core i3, i5, i7 (35W) and Celeron (17W) of the Intel® Ivy Bridge™ platform. The "all in one" motherboard provides three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, two USB 2.0 ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output and a SATA II CFast slot with rear external access, an mSATA connector for SATA III SSD, one SATA III

connector for the installation of 2.5" HDD/SSD, up to 16 GB RAM with two DDR3 SODIMM modules and an internal connector for additional serial, USB or Ethernet interfaces. The HT3000 family is available with 16 million colours LED Backlight TFT LCDs from 12.1" to 24", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 12.1", 15", 17" and 19" LCD can have a Stainless Steel

True Flat front panel. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. HT3000 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x4 slot.



Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- 17W (Celeron) or 35W (Core i3, i5, i7) processors - Intel® Ivy Bridge™ platform
- Fanless panel IPC with 0°C÷50°C operating temperature
- 12.1" and 15" LCDs in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 12.1", 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- S1 version with one PCI or PCIe x4 expansion slot
- CE, cULus LISTED (508) certifications

Gallery



Technical data

	HT3000	HT3000-TF	HT3000-TFX	HT3000-TFM
LED backlight TFT LCD	12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1920x1080	17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	12.1" W - 1280x800 15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium
PROTECTION GRADE	IP66 - frontal			
PROCESSOR	Intel® Celeron™ 1047E, 1.40GHz, 2 cores / 2 threads, 2MB Smart cache, 17W Intel® Celeron™ 1020E, 2.20GHz, 2 cores / 2 threads, 2MB Smart cache, 35W Intel® Core™ i3-3120ME, 2.40GHz, 2 cores / 4 threads, 3MB Smart cache, 35W Intel® Core™ i5-3610ME, 2.70GHz (3.3GHz Turbo), 2 cores / 4 threads, 3MB Smart cache, 35W Intel® Core™ i7-3612QE, 2.1GHz (3.1GHz Turbo), 4 cores / 8 threads, 6MB Smart cache, 35W			
CHIPSET	Intel® HM76 Express Chipset			
VIDEO CONTROLLER	Intel® HD Graphics, 650MHz integrated in Celeron™ microprocessor Intel® HD Graphics 4000, 650MHz integrated in Core™ microprocessor			
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (2 x SODIMM DDR3 modules)			
MASS STORAGE	1 bootable CFast SATA II slot onboard with external access 1 x onboard connector for 2.5" SSD/HDD SATA III with internal installation kit 1 x onboard connector for direct insertion of mSATA SSD SATA III			
LAN	3 x LAN 10/100/1000Mbps (2 x Intel® 82574L, 1 x Intel® 82579LM)			
USB	2 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		2 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A)	
SERIAL	1 x RS232 (DB9M)			
PS/2	1 x PS/2 for keyboard or mouse			
VIDEO OUTPUT	1 x VGA or 1 x DVI-I (DVI-D + VGA)			
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)			
EXPANSION SLOTS	S0 1 x Ethernet10/100/1000Mbps, Intel® 82574L Unmanaged Ethernet switch 4 x 10/100/1000Mbps			
	S1 2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 1 x PCI or 1 x PCIe x4 (5 Gb/s)			
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)			
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Windows XP Pro 32 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Windows Embedded Standard 2009 (XPe SP3) 32 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit			
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD			
APPROVALS	CE, cULus LISTED (508)			

HT3200

Intel® Broadwell™ U based fanless panel IPCs



The fanless Panel IPC family HT3200 is based on the fifth generation Core i3, i5, i7 and Celeron of the Intel® Broadwell™ U platform. The "all in one" motherboard provides three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, one USB 2.0 port, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output and a SATA III CFast slot with rear external access, an mSATA connector for SATA III SSD, one SATA III connector for the installation of 2.5" HDD/

SSD, up to 16 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial, USB or Ethernet interfaces. The HT3200 family is available with 16 million colours LED Backlight TFT LCDs from 12.1" to 24", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 12.1", 15", 17" and 19" LCD can have a Stainless Steel True Flat front panel.

All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. HT3200 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in three versions, the SL with a reduced depth, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x4 slot.

Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- 15W processors - Intel® Broadwell™ U platform
- Fanless panel IPC with 0°C ÷ 50°C operating temperature
- 12.1" and 15" LCDs in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 12.1", 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- Onboard connector for NETcore X fieldbus boards
- SL version with reduced depth
- S1 version with one PCI or PCIe x4 expansion slot
- CE, cULus LISTED (61010) certifications



Gallery




Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0

Position B

- 1 x LAN Gigabit
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem



Technical data

	HT3200	HT3200-TF	HT3200-TFX	HT3200-TFM
LED backlight TFT LCD	12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1920x1080	17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	12.1" W - 1280x800 15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium
PROTECTION GRADE	IP66 - frontal			
PROCESSOR (soldered)	Intel® Celeron 3765U 1,9Ghz, 2 cores - 2 threads - 2MB smart cache - 15W Intel® Core™ i3-5010U 2,1Ghz, 2 cores - 4 threads - 3MB smart cache - 15W Intel® Core™ i5-5350U 1,8Ghz (2,9Ghz Turbo), 2 cores - 4 threads - 3MB smart cache - 15W Intel® Core™ i7-5650U 2,2Ghz (3,1Ghz Turbo), 2 cores - 4 threads - 4MB smart cache - 15W			
CHIPSET	Intel® Broadwell PCH-LP (Platform Controller Hub - Low Power) • Included into processor chip			
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor Celeron 3765U, 850MHz Clock Intel® HD Graphics 5500 integrated in microprocessor i3, 900MHz Clock Intel® HD Graphics 6000 integrated in microprocessor i5, i7, 1GHz Clock with LVDS 8bit/color digital interface			
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (1 x SODIMM DDR3 module)			
MASS STORAGE	1 bootable CFast SATA III slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA III			
LAN	3 x Ethernet 10/100/1000 Mbps (RJ45 - 2 x Intel® I210-AT, 1 x Intel® I218-LM)			
USB	2 x USB 3.0 rear (Type-A) 1 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		2 x USB 3.0 rear (Type-A) 1 x USB 2.0 rear (Type-A)	
SERIAL	1 x RS232 (DB9M)			
VIDEO OUTPUT	1 x DVI-D			
ADD-ON INTERFACES (only S0/S1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A)			
Position A (max 1)	2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)			
Position B (max 1)	1 x LAN 10/100/1000Mbps (RJ45 - Intel® I210) 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter			
EXPANSION SLOTS S1	1 x PCI or 1 x PCIe x4 (5 Gb/s)			
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)			
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit			
OPERATING TEMPERATURE	0°C ÷ 50°C 0°C ÷ 45°C with 24x7 HDD			
APPROVALS	CE, cULus LISTED (61010)			

HT3400 / HT3600 [new]

Intel® Skylake™ H and Kaby Lake™ M based fanless panel IPCs



The fanless Panel IPC family HT3400 is based on the 6th generation Core i3, i5, i7 and Celeron of the Intel® Skylake™ H and the HT3600 family is based on the 7th generation Core i3, i5, i7 of the Intel® Kaby Lake™ M platform.

The "all in one" motherboard provides four Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, three USB 3.0 ports, two USB 2.0 port, a serial RS232 interface, a DVI-D video output and a SATA III CFAST slot with rear external access, an mSATA connector for a SATA III SSD, one SATA III connector for 2.5" SSD/HDD, up to 32 GB RAM with two DDR4 SODIMM modules and an internal connector for additional

interfaces, including serial, USB, Ethernet and remotation of the video and USB signals up to 100m (Remote Video Link). The HT3400 / HT3600 families are available with 16 million colours LED Backlight TFT LCDs from 12.1" to 24", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 12.1", 15", 17" and 19" LCD can have a

Stainless Steel True Flat front panel. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. The systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x4 slot.

+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- High performance Intel® Skylake™ H (HT3400) and Kaby Lake™ M (HT3600) platforms
- "All in one" motherboard
- Fanless panel IPC with 0°C÷50°C operating temperature
- 12.1" and 15" LCDs in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- Onboard connector for NETcore X fieldbus boards
- S1 version with one PCI or PCIe x4 expansion slot
- CE, cULus LISTED (61010) certifications

Gallery




Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0
- 1 x NETcore X fieldbus board

Position B

- 1 x LAN Gigabit
- 1/2 x RJ45 Remote Video Link (RLV OUT)
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem

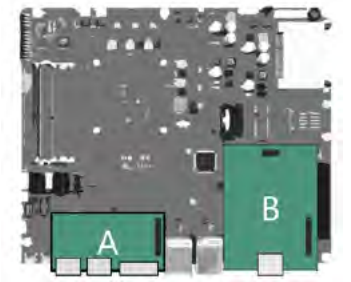


Technical data

	HT3400/HT3600	HT3400 HT3600-TF	HT3400/HT3600-TFX	HT3400/HT3600-TFM	
LED backlight TFT LCD	12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1920x1080	17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	12.1" W - 1280x800 15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768	18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch	
FRONT PANEL	Aluminium	True Flat Aluminium	True Flat Stainless Steel	True Flat Aluminium	
PROTECTION GRADE	IP66 - frontal				
PROCESSOR (soldered)	HT3400: Intel® Celeron G3900E 2.40GHz 64bit, 2 cores / 2 threads, 2MB Smart cache Intel® Core i3-6100E 2.70GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-6440EQ 2.70GHz (3.40GHz Turbo) 64bit, 4 cores / 4 threads, 6MB Smart cache Intel® Core i7-6820EQ 2.80GHz (3.50GHz Turbo) 64bit, 4 cores / 8 threads, 8MB Smart cache HT3600: Intel® Core i3-7100E 2.90GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-7440EQ 2.90GHz (3.60GHz Turbo) 64bit, 4 cores / 4 threads, 6MB Smart cache Intel® Core i7-7820EQ 3.00GHz (3.70GHz Turbo) 64bit, 4 cores / 8 threads, 8MB Smart cache				
CHIPSET	HT3400: Intel® HM170 PCH (Platform Controller Hub) for HT3400 HT3600: Intel® HM175 PCH (Platform Controller Hub) for HT3600				
VIDEO CONTROLLER	HT3400: Intel® HD Graphics 510 integrated in Celeron processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 530 integrated in Core i3 processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 530 integrated in Core i5, Core i7 processors • 350MHz/1,00GHz • DirectX 12 and OpenGL 4.4 support HT3600: Intel® HD Graphics 630 integrated in Core i3 processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.5 support Intel® HD Graphics 630 integrated in Core i5, Core i7 processors • 350MHz/1,00GHz • DirectX 12 and OpenGL 4.5 support				
SYSTEM MEMORY - RAM	4GB (1 x SODIMM DDR4 module) or 8GB or 16GB or 32GB (2 x SODIMM DDR4 modules)				
TPM	TPM module (optional)				
MASS STORAGE	1 bootable CFAST SATA III slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA III 1 x onboard connector for 2.5" SSD/HDD SATA III with internal installation kit				
LAN	4 x LAN 10/100/1000Mbps (RJ45 - 3 x Intel® I210 + 1 x Intel® I219LM)				
USB	3 x USB 3.0, rear (Type-A) 2 x USB 2.0, rear (Type-A) 1 x USB 2.0, front, protected (Type-A)		3 x USB 3.0, rear (Type-A) 2 x USB 2.0, rear (Type-A)		
SERIAL	1 x RS232 (DB9M)				
VIDEO OUTPUT	1 x DVI-D				
ADD-ON INTERFACES	1 or 2 x RJ45 connectors Remote Video Link (DVI-D and USB 2.0 signals remotation up to 100 m, optional)*				
Position A (max 1)	1 x RS232/422/485 (DB15M)+ 1 x USB 2.0 (Type-A)				
	1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A)				
Position B (max 1)	2 x RS232 (DB9M)				
	2 x USB 2.0 (Type-A)				
	1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols				
Position B (max 1)	1 x RJ45 connector Remote Video Link (RVL OUT)				
	2 x RJ45 connectors Remote Video Link (RVL OUT)				
	1 x LAN 10/100/1000Mbps (RJ45 - Intel® I210)				
EXPANSION SLOTS S1	1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols				
	1 x Wireless/Bluetooth/Modem adapter				
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)				
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64bit (HT3400) Microsoft Windows Embedded Standard 7E/7P 32/64bit (HT3400, WES7E not for TFM) Microsoft Windows 8.1 Industry Pro 32/64bit (HT3400) Microsoft Windows 10 IoT Enterprise 2016 64bit (HT3400 / HT3600)				
OPERATING TEMPERATURE	0°C÷50°C				
APPROVALS	0°C÷45°C with 24x7 HDD or Core i7 processors CE, cULus LISTED (61010)				

HT5000

Intel® Ivy Bridge™ based highly expandable panel IPCs

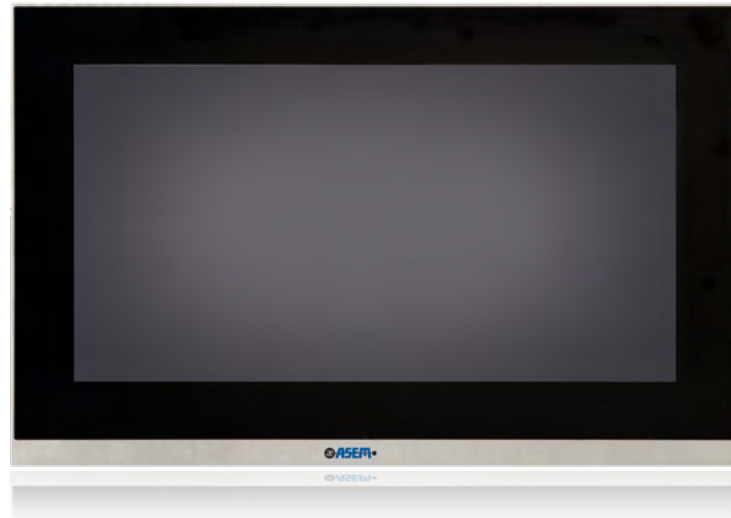

The Panel IPC family HT5000 is based on the third generation Core i3, i5, i7 (35/45W) and Celeron (35W) of the Intel® Ivy Bridge™ platform. The "all in one" motherboard provides three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and

"Wake on Lan" functionalities, two USB 3.0 ports, two USB 2.0 ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output and a SATA II CFast slot with rear external access, an mSATA connector for SATA II SSD, two SATA III connector for the installation of 2.5" HDDs/SSDs, the possibility to set the mass storages in RAID 0,1 configuration, up to 16 GB RAM with two DDR3 SODIMM modules and an internal connector for additional serial, USB or Ethernet interfaces.

The HT5000 family is available with 16 million colours LED Backlight TFT LCDs from 15" to 24", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 15", 17" and 19" LCD can have a Stainless Steel True Flat front panel. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected

capacitive touchscreen. HT5000 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack, or as an alternative a 110/230 VAC power supply. The systems are available in three versions, the S0 with the possibility to install additional interfaces, the S1 with a PCI or PCIe x4 slot and the S3 with three PCI slots or two PCI + one PCIe x4 slots.

Highlights

- UBIQUITY remote assistance software providing remote access to the system
- RAID 0,1 (optional)
- "All in one" motherboard
- 35W (Celeron) or 35/45W (Core i3, i5, i7) processors - Intel® Ivy Bridge™ platform
- Panel IPC with 0°C ÷ 50°C operating temperature
- 15" LCD in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- 110/230 VAC or isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional, only for S0 and S1 with 24 VDC power supply)
- S1 version with one PCI or PCIe x4 expansion slot
- S3 version with three PCI or PCIe x4 expansion slots
- CE, cULus LISTED (508) certifications

Gallery



Technical data

	HT5000	HT5000-TF	HT5000-TFX	HT5000-TFM
LED backlight TFT LCD	15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 18.5" W - 1366x768	19" - 1280x1024 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080	15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium
PROTECTION GRADE	IP66 - frontal			
PROCESSOR (on socket)	Intel® Celeron™ 1020E, 2.20GHz, 2 cores / 2 threads, 2MB Smart cache, 35W Intel® Core™ i3-3120ME, 2.40GHz, 2 cores / 4 threads, 3MB Smart cache, 35W Intel® Core™ i5-3610ME, 2.70GHz (3.3GHz Turbo), 2 cores / 4 threads, 3MB Smart cache, 35W Intel® Core™ i7-3610QE, 2.30GHz (3.3GHz Turbo), 4 cores / 8 threads, 6MB Smart cache, 45W			
CHIPSET	Intel® HM76 Express Chipset			
VIDEO CONTROLLER	Intel® HD Graphics, 650MHz integrated in Celeron™ microprocessor Intel® HD Graphics 4000, 650MHz integrated in Core™ microprocessor			
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (2 x SODIMM DDR3 modules)			
RAID	RAID 0, 1 (optional) with Intel® QM77 Express Chipset			
MASS STORAGE	1 bootable CFast SATA II slot onboard with external access 2 x onboard connectors for 2.5" SSD/HDD SATA III with internal installation kit or extractable drawers 1 x onboard connector for direct insertion of mSATA SSD SATA II			
LAN	3 x LAN 10/100/1000Mbps (2 x Intel® 82574L, 1 x Intel® 82579LM)			
USB	2 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		2 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A)	
SERIAL	1 x RS232 (DB9M)			
PS/2	1 x PS/2 for keyboard or mouse			
VIDEO OUTPUT	1 x VGA or 1 x DVI-I (DVI-D + VGA)			
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A) 1 x Ethernet 10/100/1000Mbps, Intel® 82574L Unmanaged Ethernet switch 4 x 10/100/1000Mbps			
EXPANSION SLOTS	S0	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards		
	S1	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 1 x PCI or PCIe x4 (5 Gb/s)		
	S3	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 3 x PCI or 2 x PCI + 1 x PCIe x4 (5 Gb/s)		
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional only for S0 or S1 versions) with external battery pack or 110V / 230VAC			
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Windows XP Pro 32 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Windows Embedded Standard 2009 (XPe SP3) 32 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit			
OPERATING TEMPERATURE	0°C ÷ 50°C 0°C ÷ 45°C with 24x7 HDD			
APPROVALS	CE, cULus LISTED (508)			

Book Mounting IPCs

ASEM recently completed its Box IPCs portfolio with a complete range of book mounting systems, combining performances, design, ergonomics and configurability. Based on ARM Cortex A9 or Intel® Apollo Lake™, Bay Trail™, Skylake™ and Kaby Lake™ platforms, they are supplied with a sturdy aluminium or plastic chassis, highly refined in every aesthetic and ergonomic detail.



BM40

ARM Cortex A9 multicore based Book Mounting IPCs



The Book Mounting BM40 is based on the ARM Cortex A9 1GHz dual core processor (i.MX6 DualLite). The plastic case and the aluminium hooking system ensure a reliable fixing on a standard 35mm DIN rail.

The motherboard provides, on the front, one 10/100/1000 Mbps and one 100 Mbps Ethernet ports, two USB 2.0 ports, one RS232/485 serial port, a DVI-D video output and the signaling LEDs. The motherboard also provides an

internal slot for a removable MicroSD memory card, 4GB pseudo-SLC eMMC memory and 1 GB DDR3 RAM. BM40 has an isolated 24 VDC power supply input.



+ Highlights

- Ubiquity remote assistance software providing remote access to the system
- ARM Cortex A9 i.MX6 DualLite processor
- Fanless ARM based book mounting IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- CE, cULus LISTED (61010) certifications

Gallery



Technical data

		BM40
O.S. CERTIFIED	Installation	Microsoft Windows Embedded Compact 7 Pro with Datalight Reliance Nitro file system
	Material	Embedded Linux
PROCESSOR		ARM Cortex A9 1 GHz i.MX6 DualLite
SYSTEM MEMORY - RAM		1 GB with DDR3 soldered
MASS STORAGE		4 GB eMMC Pseudo-SLC (Solid State Disk) 8bit, file system organization 1 x microSD slot internal access (FAT file system)
LAN		1 x 100 Mbps (RJ45); 1 x 10/100/1000 Mbps (RJ45 - Intel 82574L)
USB		2 x USB 2.0 (Type-A)
SERIAL		1 x RS232/485 isolated (DB15M)
BATTERY		1 x CR2032 Removable (internal)
VIDEO OUTPUT		1 x DVI-D
POWER SUPPLY INPUT		24VDC (18÷36VDC) isolated
CASE	Installation	For book mounting on DIN rail guide
	Material	Aluminium frame and hook, plastic shell
OPERATING TEMPERATURE		0°C÷50°C
APPROVALS		CE, cULus LISTED (61010) pending

BM100 [new]

Intel® Apollo Lake™ based fanless book mounting IPCs



The Book Mounting BM100 is based on the Intel® Atom™ x5-3930 1.3GHz (1.80GHz Burst) or x7-3950 1.6GHz (2.00GHz Burst) processors of the Intel® Apollo Lake™ System On Chip (SoC) platform.

The motherboard provides two 10/100/1000Mbps ports, two USB 3.0 ports and a Display Port V1.2 video output with external access, a SATA III interface with M.2 key B connector for M.2 size 2242 SSD and 4GB or 8GB soldered

LP-DDR4 RAM. BM100 has an isolated 24 VDC power supply input and allows several wall mounting or DIN rail installation modes.

Gallery



Technical data

		BM100
REMOTE ASSISTANCE SW		ASEM UBIQUITY BASIC
PROCESSOR (soldered)		Intel® Atom™ x5-E3930 1.3GHz (1.8GHz Burst), 2 cores / 2 threads, 2MB L2 cache, 14nm Intel® Atom™ x7-E3950 1.6GHz (2.0GHz Burst), 4 cores / 4 threads, 2MB L2 cache, 14nm
VIDEO CONTROLLER		Intel® HD Graphics 500 integrated in x5-E3930, 400/550MHz Intel® HD Graphics 505 integrated in x7-E3950, 500/650MHz
SYSTEM MEMORY - RAM		2GB or 4GB or 8GB (1 x LP-DDR4 soldered)
MASS STORAGE		1 x onboard connector for direct insertion of M.2 size 2242 key B SSD SATA III
LAN		2 x LAN 10/100/1000Mbps (2 x Intel® I210)
USB		2 x USB 3.0 (Type-A)
VIDEO OUTPUT		1 x Display Port V1.2
POWER SUPPLY INPUT		24VDC (18 ÷ 32VDC) isolated
CASE	Installation	For book, wall or DIN rail mounting
	Material	Aluminium Alloy
O.S. CERTIFIED		Microsoft Windows 10 IoT Enterprise 2016 64 bit
OPERATING TEMPERATURE		0°C ÷ 50°C
APPROVALS		CE, cULus LISTED (61010) pending



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Compact design (100x100x41mm)
- "All in one" motherboard
- Intel® Apollo Lake™ SoC platform
- Fanless book mounting IPC with 0°C ÷ 50°C operating temperature
- 24 VDC isolated power supply input
- CE, cULus LISTED (61010) certifications

BM2150

Entry level Intel® Bay Trail™ based fanless book mounting IPCs



The Book Mounting fanless IPC BM2150 is an entry-level solution that offers an excellent performance/price ratio. It is based on the Celeron J1900 2GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. The "all in one" motherboard

provides, on top, two Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, one USB 3.0 port, one USB 2.0 port, a DVI-D video output and on front a SATA II CFast slot. The motherboard has also an mSATA connector for SATA II SSD, up to 8 GB RAM with

one DDR3 SODIMM module and an internal connector for additional serial and USB interfaces. BM2150 system has an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Support to 32 or 64 bit operating systems
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless book mounting IPC with 0°C÷50°C operating temperature
- Optional DIN rail mounting
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- Onboard connector for NETcore X fieldbus boards
- CE, cULus LISTED (61010) certifications


Gallery



Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 1 x USB 2.0
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem

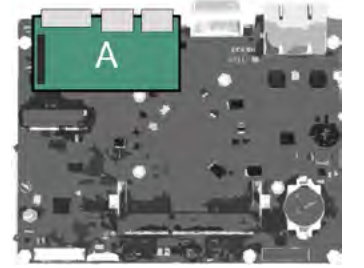

Technical data

		BM2150
PROCESSOR		Intel® Celeron J1900 2.00Ghz (2.42GHz Burst) a 64 bit, 4 cores / 4 threads, 2MB L2 cache, soldered
VIDEO CONTROLLER		Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface
SYSTEM MEMORY - RAM		1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)
MASS STORAGE		1 bootable CFast SATA II slot onboard with front external access 1 x onboard connector for direct insertion of mSATA SSD SATA II
LAN		2 x LAN 10/100/1000Mbps top (RJ45 - 2 x Intel® I210)
USB		1 x USB 3.0 top (Type-A) 1 x USB 2.0 top (Type-A)
BATTERY		1 x CR2032 internal access
VIDEO OUTPUT		1 x DVI-D, top
ADD-ON INTERFACES (max 1)		1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A)
		1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A)
		2 x RS232 (DB9M)
		1 x USB 2.0 (Type-A)
		1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols
		1 x Wireless/Bluetooth/Modem adapter
POWER SUPPLY INPUT		24VDC (18÷32VDC) isolated with UPS (optional) with external battery pack Kit for ATX mode power supply (optional)
CASE	Installation	For wall or DIN rail book mounting (optional)
	Material	Aluminium alloy 6082/5754/5056, Plastic front door
O.S. CERTIFIED		Microsoft Windows 7 Pro/Ultimate 32/64bit Microsoft Windows Embedded Standard 7E/7P 32/64 bit Microsoft Windows 8.1 Industry Pro 32/64bit Microsoft Windows 10 64bit Microsoft Windows 10 IoT Enterprise 2016 64bit
OPERATING TEMPERATURE		0°C÷50°C
APPROVALS		CE, cULus LISTED (61010)

BM2200

Intel® Bay Trail™ based fanless book mounting IPCs



The Book Mounting fanless IPCs of the BM2200 family are based on the Celeron J1900 2.0GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. BM2200 systems are supplied with a sturdy aluminum chassis, highly refined in every aesthetic and ergonomic detail. The "all in one" motherboard provides, on top, two

Ethernet 10/100/1000Mbps ports that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 2.0 ports, a DVI-I (DVI-D + VGA) video output or, as an alternative, a Remote Video Link connector (RJ45) for the remotation of the video and USB signals up to 100 m; on front, a USB 3.0 port, a slot for a SATA II CFAST, a slot for the extractable system battery and the signalling LEDs. The

motherboard provides also an mSATA connector for a SATA II SSD, a SATA II connector for a 2.5" SSD/HDD, the possibility to install up to 8 GB RAM with one DDR3 SODIMM module and an internal connector for the installation of additional serial and LAN interfaces. BM2200 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Highly refined aluminium chassis
- Support to 32 or 64 bit operating systems
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless book mounting IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- RVL version (Remote Video Link) with remotation of DVI and USB 2.0 signals up to 100m
- CE, cULus LISTED (61010) certifications

Gallery



Technical data

	BM2200	BM2200 RVL
PROCESSOR	Intel® Celeron J1900 2.00Ghz (2.42GHz Burst) a 64 bit, 4 cores / 4 threads, 2MB L2 cache, soldered	
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface	
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)	
TPM	TPM module (optional)	
MASS STORAGE	1 bootable CFAST SATA II slot onboard with front external access 1 x onboard connector for direct insertion of mSATA SSD SATA II or 1 x onboard connector for 2,5" SSD/HDD SATA II with internal installation kit	
LAN	2 x LAN 10/100/1000Mbps (2 x Intel® I210)	
USB	1 x USB 3.0 front (Type-A) 2 x USB 2.0 top (Type-A)	
BATTERY	1 x CR2032 Removable from the front	
VIDEO OUTPUT	1 x DVI-I top (DVI-D + VGA with adapter)	RJ45 connector for the DVI-D and USB 2.0 signals remotation up to 100mt
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M) + 2 x RS232 (DB9M)	
	1 x RS232/422/485 (DB15M) isolated + 2 x RS232 (DB9M)	
	1 x RS232/422/485 (DB15M) + 1 x LAN 10/100/1000Mbps (Intel® I210)	
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack	
CASE	Installation	For wall book mounting
	Material	Aluminium alloy 6082/5754/5056
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 2016 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit	
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with HDD 24x7	
APPROVALS	CE, cULus LISTED (61010)	

BM3300 / BM3500 [new]

Intel® Skylake™ U and Kaby Lake™ U based fanless book mounting IPCs



The fanless Book Mounting IPC family BM3300 is based on the 6th generation Core i3, i5, i7 and Celeron dual core 15W processors of the Intel® Skylake™ U and the BM3500 family is based on the 7th generation Core i3, i5, i7 and Celeron dual core 15W processors of the Intel® Kaby Lake™ U platform. The systems are supplied with a sturdy aluminium chassis, highly refined in every aesthetic and ergonomic detail.

The "all in one" motherboard provides, on top, three Ethernet 10/100/1000Mbps ports that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports and one DVI-D video output; on front, a USB 3.0 port, a SATA III CFast slot, a slot for the extractable system battery and the signalling LEDs. The motherboard has also an mSATA connector for a SATA III SSD, one SATA III connector for a 2.5" SSD/HDD, up to 16 GB

RAM with one DDR4 SODIMM module and an internal connector for additional interfaces, including serial, USB and remotation of the video and USB signals up to 100m (Remote Video Link). The systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack.



Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Highly refined aluminium chassis
- "All in one" motherboard
- Low consumption Intel® Skylake™ U (BM3300) and Kaby Lake™ U (BM3500) platforms
- Fanless book mounting IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- RVL version (Remote Video Link) with remotation of DVI and USB 2.0 signals up to 100 m
- CE, cULus LISTED (61010) certifications


Gallery



Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0
- 1 x NETcore X fieldbus board



Technical data

	BM3300/BM3500	BM3300/BM3500 RVL
PROCESSORS (soldered)	BM3300 Intel® Celeron 3955U 2.00GHz 64bit, 2 cores / 2 threads, 2MB Smart cache Intel® Core i3-6100U 2.30GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-6300U 2.40GHz (3.00GHz Turbo) 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i7-6600U 2.60GHz (3.40GHz Turbo) 64bit, 2 cores / 4 threads, 4MB Smart cache BM3500 Intel® Celeron 3965U 2.20GHz 64bit, 2 cores / 2 threads, 2MB Smart cache Intel® Core i3-7100U 2.40GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-7300U 2.60GHz (3.50GHz Turbo) 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i7-7600U 2.80GHz (3.90GHz Turbo) 64bit, 2 cores / 4 threads, 4MB Smart cache	
CHIPSET	BM3300 Intel® Skylake U PCH (Platform Controller Hub) for BM3300 • Included into processor chip BM3500 Intel® Kaby Lake U PCH (Platform Controller Hub) for BM3500 • Included into processor chip	
VIDEO CONTROLLER	BM3300 Intel® HD Graphics 510 integrated in Celeron processor • 300MHz/900MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 520 integrated in Core i3, Core i5 processors • 300MHz/1GHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 520 integrated in Core i7 processor • 300MHz/1,05GHz • DirectX 12 and OpenGL 4.4 support BM3500 Intel® HD Graphics 620 integrated in Core i3 processors • 300MHz/1GHz • DirectX 12 and OpenGL 4.5 support Intel® HD Graphics 620 integrated in Core i5 processors • 300MHz/1,1GHz • DirectX 12 and OpenGL 4.5 support Intel® HD Graphics 620 integrated in Core i7 processor • 300MHz/1,15GHz • DirectX 12 and OpenGL 4.5 support	
SYSTEM MEMORY - RAM	4GB or 8GB or 16GB (1 x SODIMM DDR4 module)	
TPM	TPM module (optional)	
MASS STORAGE	1 bootable CFast SATA III slot onboard with external access (front) 1 x onboard connector for direct insertion of mSATA SSD SATA III 1 x onboard connector for 2,5" SSD/HDD SATA III with internal installation kit	
LAN	3 x LAN 10/100/1000Mbps (RJ45 - 2 x Intel® I210, 1 x Intel® I219LM)	
USB	1 x USB 3.0, front (Type-A) 2 x USB 3.0, top (Type-A)	
BATTERY	1 x CR2032 Removable front access	
VIDEO OUTPUT	1 x DVI-D	1 x RJ45 connector for the DVI-D and USB 2.0 signals remotation up to 100 m
ADD-ON INTERFACES	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) Position A (max 1) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A) 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols	
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with UPS (optional) with external battery pack	
CASE	Installation	Wall book mounting
	Material	Aluminium alloy 6082/5754/5056
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64bit (BM3300) Microsoft Windows Embedded Standard 7E/7P 32/64 bit (BM3300, WES7E not for TFM) Microsoft Windows 8.1 Industry Pro 32/64bit, (BM3300) Microsoft Windows 10 IoT Enterprise 2016 64bit (BM3300 / BM3500)	
OPERATING TEMPERATURE	0°C÷50°C	
	0°C÷45°C with HDD 24x7	
APPROVALS	CE, cULus LISTED (61010)	

BM3400 / BM3600 [new]

Intel® Skylake™ H and Kaby Lake™ M based fanless book mounting IPCs



The fanless Book Mounting IPC family BM3400 is based on the 6th generation Core i3, i5, i7 and Celeron of the Intel® Skylake™ H and the BM3600 family is based on the 7th generation Core i3, i5, i7 of the Intel® Kaby Lake™ M platform. The systems are supplied with a sturdy aluminum chassis, highly refined in every aesthetic and ergonomic detail. The "all in one" motherboard provides, on top, four Ethernet 10/100/1000Mbps ports, that

support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, two USB 2.0 ports, a serial RS232 interface and one DVI-D video output; on front, a USB 3.0 port, a SATA III CFast slot, a slot for the extractable system battery, the signalling LEDs and optionally two slots for extractable storage units drawers. The motherboard has also an mSATA connector for a SATA III SSD, two SATA III connector for 2.5" SSD/HDDs, the possibility

to set the mass storage devices in RAID 0, 1 configuration, up to 32 GB RAM with two DDR4 SODIMM modules and an internal connector for additional interfaces, including serial, USB and remotation of the video and USB signals up to 100m (Remote Video Link). BM3400 and BM3600 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in

two versions, the S0 with the possibility to install additional interfaces and the S2 with two PCI or PCIe expansion slots. Optionally a forced ventilation kit is available to ensure 0°C÷50°C operating temperature with Core i7 processor or expansion cards with total power consumption not greater than 20W.



Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Highly refined aluminium chassis
- Extractable drawers for 2.5" storage devices
- RAID 0,1
- Up to 2 Remote Video Link - remotation of DVI and USB 2.0 signals up to 100m
- "All in one" motherboard
- High performance Intel® Skylake™ H and Kaby Lake™ M platforms
- Fanless book mounting IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- S2 version with two PCI or PCIe 4x expansion slots
- CE, cULus LISTED (61010) certifications

Gallery




Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0
- 1 x NETcore X fieldbus board

Position B

- 1 x RJ45 Remote Video Link (RVL OUT)
- 2 x RJ45 Remote Video Link (RVL OUT)



Technical data

		BM3400/BM3600
PROCESSORS	BM3400	Intel® Celeron G3900E 2.40GHz 64bit, 2 cores / 2 threads, 2MB Smart cache Intel® Core i3-6100E 2.70GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-6440EQ 2.70GHz (3.40GHz Turbo) 64bit, 4 cores / 4 threads, 6MB Smart cache Intel® Core i7-6820EQ 2.80GHz (3.50GHz Turbo) 64bit, 4 cores / 8 threads, 8MB Smart cache
	BM3600	Intel® Core i3-7100E 2.90GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-7440EQ 2.90GHz (3.60GHz Turbo) 64bit, 4 cores / 4 threads, 6MB Smart cache Intel® Core i7-7820EQ 3.00GHz (3.70GHz Turbo) 64bit, 4 cores / 8 threads, 8MB Smart cache
	CHIPSET	BM3400 Intel® HM170 PCH (Platform Controller Hub) BM3600 Intel® HM175 PCH (Platform Controller Hub)
S2 versions with 2x PCIe x4		Intel® CM236 PHC (Platform Controller Hub)
VIDEO CONTROLLER	BM3400	Intel® HD Graphics 510 integrated in Celeron processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 530 integrated in Core i3 processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 530 integrated in Core i5, Core i7 processors • 350MHz/1,00GHz • DirectX 12 and OpenGL 4.4 support
	BM3600	Intel® HD Graphics 630 integrated in Core i3 processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.5 support Intel® HD Graphics 630 integrated in Core i5, Core i7 processors • 350MHz/1,00GHz • DirectX 12 and OpenGL 4.5 support
SYSTEM MEMORY - RAM		4GB (1 x SODIMM DDR4 module) or 8GB or 16GB or 32GB (2 x SODIMM DDR4 modules)
TPM		TPM module (optional)
MASS STORAGE	S0 / S2	1 bootable CFast SATA III slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA III
	S0	without RVL: onboard connectors for 1 x SSD/HDD 2.5" SATA III with internal installation kit or max 2 x SSD/HDD 2.5" SATA III with front extractable drawers
	S2	with RVL: onboard connector for 1 x SSD/HDD 2.5" SATA III with internal installation kit or with front extractable drawer onboard connectors for max 2 x SSD/HDD 2.5" SATA III with internal installation kit or with front extractable drawers
LAN		4 x LAN 10/100/1000Mbps top (RJ45 - 3 x Intel® I210 + 1 x Intel® I219LM)
USB		1 x USB 3.0 front (Type-A) 2 x USB 2.0 top (Type-A) + 2 x USB 3.0 top (Type-A)
SERIAL		1 x RS232 (DB9M)
BATTERY		1 x CR2032 Removable front access
VIDEO OUTPUT		1 x DVI-D, top 1 or 2 x RJ45 connectors Remote Video Link (DVI-D and USB 2.0 signals remotation up to 100 m, optional)
ADD-ON INTERFACES		1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A)
	Position A (max 1)	1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)
	Position B (max 1)	1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x connector Remote Video Link (RJ45 - RVL OUT) 2 x connectors Remote Video Link (RJ45 - RVL OUT)
EXPANSION SLOTS	S2	2 x PCIe x4 or 1 x PCI + 1 x PCIe x4 (5 Gb/s), max 10W total
VENTILATION (optional)		Forced ventilation kit for 0°C÷50°C operating temperature with Core i7 processors or expansion card with max 20W total
POWER SUPPLY INPUT		24VDC (18÷32VDC) isolated with UPS (optional) with external battery pack
CASE	Installation	For book mounting
	Material	Aluminium Alloy 6082/5754/5056
O.S. CERTIFIED		Microsoft Windows 7 Pro/Ultimate 32/64bit (BM3400) Microsoft Windows Embedded Standard 7E/7P 32/64 bit (BM3400, WES7E not for TFM) Microsoft Windows 8.1 Industry Pro 32/64bit, (BM3400) Microsoft Windows 10 IoT Enterprise 2016 64bit (BM3400 / BM3600)
OPERATING TEMPERATURE		without forced ventilation: 0°C÷50°C, 0°C÷45°C with HDD 24x7 or Core i7
		with forced ventilation: 0°C÷50°C, 0°C÷45°C with HDD 24x7
APPROVALS		CE, cULus LISTED (61010)

Box IPCs

ASEM provides a full range of Box IPCs in terms of configurability, dimensions and performances. They are based on Atom, Celeron, Core™ i3, i5, i7 dual and quad core processors and they are suitable for wall or DIN rail mounting.



PB2000

Intel® Cedar Trail™ based fanless box IPCs



The fanless box IPC family PB2000 is based on the Atom™ D2550 1,86GHz dual core processor of the Intel® Cedar Trail™ platform. The "all in one" motherboard provides two Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, four USB 2.0 ports, a serial

RS232 interface, a VGA or DVI-I (DVI-D + VGA) video output and a SATA II CFast slot with external access, one SATA II connector for the installation of 2.5" HDD/SSD, up to 4 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial and USB interfaces.

PB2000 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x1 slot.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- Intel® Cedar Trail™ platform
- Fanless box IPC with 0°C ÷ 50°C operating temperature
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- S1 version with one PCI or PCIe x1 expansion slot
- CE, cULus LISTED (508) certifications

Gallery



Technical data

	PB2000
PROCESSOR	Intel® Atom™ D2550 1,86 GHz, 2 cores / 4 threads, 1MB L2 cache, soldered
CHIPSET	Intel® NM10
VIDEO CONTROLLER	Integrated in Intel® Atom™ microprocessor, 640MHz, LVDS 8bit/colour digital interface
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB (1 x SODIMM DDR3 module)
MASS STORAGE	1 bootable CFast SATA II slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA II or 1 x onboard connector for 2,5" SSD/HDD SATA II with internal installation kit
LAN	2 x LAN 10/100/1000Mbps (2 x Intel® 82574L)
USB	4 x USB 2.0 (Type- A)
SERIAL	1 x RS232 (DB9M)
VIDEO OUTPUT	1 x VGA or 1 x DVI-I (DVI-D + VGA)
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M)+ 1 x USB 2.0 (Type-A)
	1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A)
EXPANSION SLOTS	S0 2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards
	S1 2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 1 x PCI or 1 x PCIe x1 (2.5 Gb/s)
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32 bit, Windows XP Pro 32 bit, Microsoft Windows Embedded Standard 7E/7P 32 bit, Windows Embedded Standard 2009 (XPe SP3) 32 bit, Microsoft Windows Embedded Compact 7 Pro
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD
APPROVALS	CE, cULus LISTED (508)

PB2150

Intel® Bay Trail™ based fanless box IPCs



The fanless box IPC family PB2150 is an entry-level that offers an excellent performance/price ratio. It is based on the Celeron J1900 2GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. The "all in one" motherboard provides two Ethernet 10/100/1000Mbps ports, that

support "Jumbo Frame" and "Wake on Lan" functionalities, a USB 3.0 port, a USB 2.0 port, a DVI-D video output and a SATA II CFAST slot with external access, an mSATA connector for SATA II SSD, up to 8 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial and USB interfaces. PB2150 systems have an

isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the SL with a reduced depth and the S0 with the possibility to install additional interfaces.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Support to 32 or 64 bit operating systems
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless box IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- SL version with reduced depth
- CE, cULus LISTED (61010) certifications


Gallery



Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 1/2 x USB 2.0
- 1 x LAN Gigabit + 1 x USB 2.0
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem

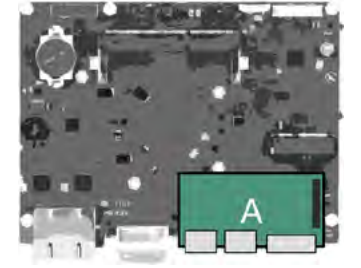

Technical data

	PB2150
PROCESSOR	Intel® Celeron® Processor J1900 2.00GHz (2.42GHz Burst) a 64 bit, 4 cores / 4 threads, 2MB L2, 22nm technology
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)
MASS STORAGE	1 bootable CFAST SATA II slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA II
LAN	2 x LAN 10/100/1000Mbps (RJ45 - 2 x Intel® I210)
USB	1 x USB 3.0 rear (Type-A) 1 x USB 2.0 rear (Type-A)
VIDEO OUTPUT	1 x DVI-D
ADD-ON INTERFACES (only for S0, max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 1 x USB 2.0 (Type-A) 2 x USB 2.0 (Type-A) 1 x LAN 10/100/1000Mbps (RJ45 - Intel®I210) + 1 x USB 2.0 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional for S0)
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 2016 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit
OPERATING TEMPERATURE	0°C÷50°C
APPROVALS	CE, cULus LISTED (61010)

PB2200

Intel® Bay Trail™ based fanless box IPCs



The fanless box IPC family PB2200 is based on the Celeron J1900 2GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. The "all in one" motherboard provides two Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, one USB 3.0 port, two USB 2.0

ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output and a SATA II CFAST slot with external access, an mSATA connector for SATA II SSD, one SATA II connector for the installation of 2.5" HDD/SSD, up to 8 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial and USB interfaces.

PB2200 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in three versions, the SL with a reduced depth, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x1 slot.

+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Support to 32 or 64 bit operating systems
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless box IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- SL version with reduced depth
- S1 version with one PCI or PCIe x1 expansion slot
- CE, cULus LISTED (508) certifications

Gallery




Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0

Position B

- 1 x LAN Gigabit
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem



Technical data

	PB2200
PROCESSOR	Intel® Celeron J1900 2.0Ghz (2.42Ghz Burst) 64 bit, 4 cores / 4 threads, 2MB L2 cache, soldered
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)
MASS STORAGE	1 bootable CFAST SATA II slot onboard with external access
SL/S0/S1	1 x onboard connector for direct insertion of mSATA SSD SATA II
S0/S1	1 x bootable CFAST SATA II slot on board with external access 1 x onboard connector for 2,5" SSD/HDD 24x7 SATA II with internal installation kit (HT2200 S0/S1)
LAN	2 x LAN 10/100/1000Mbps (RJ45 - 2 x Intel® I210)
USB	1 x USB 3.0 rear (Type-A) 2 x USB 2.0 rear (Type-A)
SERIAL	1 x RS232 (DB9M)
VIDEO OUTPUT	1 x DVI-I (DVI-D + VGA with adapter)
ADD-ON INTERFACES (only for S0/S1)	1 x RS232/422/485 (DB15M)+ 1 x USB 2.0 (Type-A)
Position A (max 1)	1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)
Position B (max 1)	1 x LAN 10/100/1000Mbps (RJ45 - Intel® I210) 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter
EXPANSION SLOTS S1	1 x PCI
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD
APPROVALS	CE, cULus LISTED (508)

PB3000 / PB3010

Intel® Ivy Bridge™ based fanless box IPCs



The fanless box IPC family PB3000/PB3010 is based on the third generation Core i3, i5, i7 (35W) and Celeron (17W) of the Intel® Ivy Bridge™ platform. The "all in one" motherboard provides three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, two USB 2.0 ports, a serial RS232

interface, a DVI-I (DVI-D + VGA) video output and a SATA II CFAST slot with external access, an mSATA connector for SATA III SSD, one SATA III connector for the installation of 2.5" HDD/SSD, up to 16 GB RAM with two DDR3 SODIMM modules and an internal connector for additional serial, USB or Ethernet interfaces. PB3000/PB3010 systems have an isolated 24 VDC power

supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x4 slot. PB3010 versions have two digital video output, a DVI-I (DVI-D + VGA) and a DVI-D.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- 17W (Celeron) or 35W (Core i3, i5, i7) processors - Intel® Ivy Bridge™ platform
- Fanless box IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional)
- PB3010 version with double DVI output
- S1 version with one PCI or PCIe x4 expansion slot
- CE, cULus LISTED (508) certifications

Gallery



Technical data

	PB3000	PB3010	
PROCESSOR	Intel® Celeron™ 1047UE, 1.40GHz, 2 cores / 2 threads, 2MB smart cache, 17W Intel® Celeron™ 1020E, 2.20GHz, 2 cores / 2 threads, 2MB smart cache, 35W Intel® Core™ i3-3120ME, 2.40GHz, 2 cores / 4 threads, 3MB smart cache, 35W Intel® Core™ i5-3610ME, 2.70GHz (3.3GHz turbo), 2 cores / 4 threads, 3MB smart cache, 35W Intel® Core™ i7-3612QE, 2.1GHz (3.1GHz turbo), 4 cores / 8 threads, 6MB smart cache, 35W		
CHIPSET	Intel® HM76 Express Chipset		
VIDEO CONTROLLER	Intel® HD Graphics, 650MHz integrated in Celeron™ microprocessor Intel® HD Graphics 4000, 650MHz integrated in Core™ microprocessor		
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (2 x SODIMM DDR3 modules)		
MASS STORAGE	1 bootable CFAST SATA II slot onboard with external access 1 x onboard connector for 2.5" SSD/HDD SATA III with internal installation kit 1 x onboard connector for direct insertion of mSATA SSD SATA III		
LAN	3 x LAN 10/100/1000Mbps (2 x Intel® 82574L, 1 x Intel® 82579LM)		
USB	2 x USB 3.0 (Type-A) 2 x USB 2.0 (Type-A)		
SERIAL	1 x RS232 (DB9M)		
VIDEO OUTPUT	1 x VGA or 1 x DVI-I (DVI-D + VGA)	1 x DVI-I 1 x DVI-D	
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A)		
	1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A)		
	2 x RS232 (DB9M)		
	2 x USB 2.0 (Type-A)		
EXPANSION SLOTS	1 x Ethernet 10/100/1000Mbps, Intel® 82574L Unmanaged Ethernet switch 4 x 10/100/1000Mbps		
	S0	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards	-
	S1	2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 1 x PCI or 1 x PCIe x4 (5 Gb/s)	1 x PCI or 1 x PCIe x4 (5 Gb/s)
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)		
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Windows XP Pro 32 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Windows Embedded Standard 2009 (XPe SP3) 32 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit		
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD		
APPROVALS	CE, cULus LISTED (508)		

PB3200

Intel® Broadwell™ U based fanless box IPCs



The fanless box IPC family PB3200 is based on the fifth generation Core i3, i5, i7 and Celeron of the Intel® Broadwell™ U platform. The "all in one" motherboard provides three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, one USB 2.0 port, a serial RS232

interface, a DVI-I (DVI-D + VGA) video output and a SATA III CFast slot with external access, an mSATA connector for SATA III SSD, one SATA III connector for the installation of 2.5" HDD/SSD, up to 16 GB RAM with one DDR3 SODIMM module and an internal connector for additional serial, USB or Ethernet interfaces.

PB3200 systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in three versions, the SL with a reduced depth, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x4 slot.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- 15W processors - Intel® Broadwell™ U platform
- Fanless box IPC with 0°C ÷ 50°C operating temperature
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- SL version with reduced depth
- S1 version with one PCI or PCIe x4 expansion slot
- CE, cULus LISTED (61010) certifications

Gallery




Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0

Position B

- 1 x LAN Gigabit
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem



Technical data

	PB3200
PROCESSORS	Intel® Celeron 3765U 1,9Ghz, 2 cores - 2 threads - 2MB smart cache - 15W Intel® Core™ i3-5010U 2,1Ghz, 2 cores - 4 threads - 3MB smart cache - 15W Intel® Core™ i5-5350U 1,8Ghz (2,9Ghz Turbo), 2 cores - 4 threads - 3MB smart cache - 15W Intel® Core™ i7-5650U 2,2Ghz (3,1Ghz Turbo), 2 cores - 4 threads - 4MB smart cache - 15W
CHIPSET	Intel® Broadwell PCH-LP (Platform Controller Hub - Low Power) • Included into processor chip
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor Celeron 3765U, 850MHz Clock Intel® HD Graphics 5500 integrated in microprocessor i3, 900MHz Clock Intel® HD Graphics 6000 integrated in microprocessor i5, i7, 1GHz Clock with LVDS 8bit/colour digital interface
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (1 x SODIMM DDR3 module)
MASS STORAGE	1 bootable CFast SATA II slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA III
	S0/S1 1 x onboard connector for 2.5" SSD/HDD SATA III with internal installation kit
LAN	3 x Ethernet 10/100/1000 Mbps (RJ45 - 2 x Intel® I210-AT, 1 x Intel® I218-LM)
USB	2 x USB 3.0 (Type-A) 1 x USB 2.0 (Type-A)
SERIAL	1 x RS232 (DB9M)
VIDEO OUTPUT	1 x DVI-I
ADD-ON INTERFACES	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A)
	(only S0/S1) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A)
	Position A (max 1)
	Position B (max 1)
	1 x LAN 10/100/1000Mbps (RJ45 - Intel® I210) 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter
EXPANSION SLOTS	S1 1 x PCI or 1 x PCIe x4 (5 Gb/s)
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit
OPERATING TEMPERATURE	0°C ÷ 50°C 0°C ÷ 45°C with 24x7 HDD
APPROVALS	CE, cULus LISTED (61010)

PB3400 / PB3600 [new]

Intel® Skylake™ H and Kaby Lake™ M based fanless box IPCs



The fanless Box IPC family PB3400 is based on the 6th generation Core i3, i5, i7 and Celeron of the Intel® Skylake™ H and the PB3600 family is based on the 7th generation Core i3, i5, i7 of the Intel® Kaby Lake™ M platform. The "all in one" motherboard provides four Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities,

three USB 3.0 ports, two USB 2.0 port, a serial RS232 interface, a DVI-D video output and a SATA III CFAST slot with external access, an mSATA connector for a SATA III SSD, one SATA III connector for 2.5" SSD/HDD, up to 32 GB RAM with two DDR4 SODIMM modules and an internal additional interfaces, including serial, USB, Ethernet or remotation of the video

and USB signals up to 100m (Remote Video Link). The systems have an isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack. The systems are available in two versions, the S0 with the possibility to install additional interfaces and the S1 with a PCI or PCIe x4 slot.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- "All in one" motherboard
- High performance Intel® Skylake™ H (PB3400) and Kaby Lake™ M (PB3600) platforms
- Fanless box IPC with 0°C÷50°C operating temperature
- Isolated 24 VDC power supply input
- Onboard connector for NETcore X fieldbus boards
- Integrated UPS with external battery pack (optional)
- S1 version with one PCI or PCIe x4 expansion slot
- CE, cULus LISTED (61010) certifications

Gallery




Add-On boards

Position A

- 1 x RS232/422/485 + 1 x USB 2.0
- 1 x RS232/422/485 isol. + 1 x USB 2.0
- 2 x RS232
- 2 x USB 2.0
- 1 x NETcore X fieldbus board

Position B

- 1 x LAN Gigabit
- 1/2 x RJ45 Remote Video Link (RLV OUT)
- 1 x NETcore X fieldbus board
- Wireless/Bluetooth/Modem

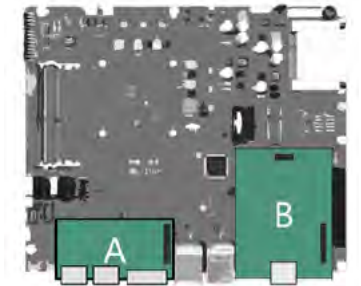

Technical data

		PB3400/PB3600
PROCESSORS (soldered)	PB3400	Intel® Celeron G3900E 2.40GHz 64bit, 2 cores / 2 threads, 2MB Smart cache Intel® Core i3-6100E 2.70GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-6440EQ 2.70GHz (3.40GHz Turbo) 64bit, 4 cores / 4 threads, 6MB Smart cache Intel® Core i7-6820EQ 2.80GHz (3.50GHz Turbo) 64bit, 4 cores / 8 threads, 8MB Smart cache
	PB3600	Intel® Core i3-7100E 2.90GHz 64bit, 2 cores / 4 threads, 3MB Smart cache Intel® Core i5-7440EQ 2.90GHz (3.60GHz Turbo) 64bit, 4 cores / 4 threads, 6MB Smart cache Intel® Core i7-7820EQ 3.00GHz (3.70GHz Turbo) 64bit, 4 cores / 8 threads, 8MB Smart cache
CHIPSET	PB3400	Intel® HM170 PCH (Platform Controller Hub) for PB3400
	PB3600	Intel® HM175 PCH (Platform Controller Hub) for PB3600
VIDEO CONTROLLER	PB3400	Intel® HD Graphics 510 integrated in Celeron processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 530 integrated in Core i3 processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.4 support Intel® HD Graphics 530 integrated in Core i5, Core i7 processors • 350MHz/1,00GHz • DirectX 12 and OpenGL 4.4 support
	PB3600	Intel® HD Graphics 630 integrated in Core i3 processor • 350MHz/950MHz • DirectX 12 and OpenGL 4.5 support Intel® HD Graphics 630 integrated in Core i5, Core i7 processors • 350MHz/1,00GHz • DirectX 12 and OpenGL 4.5 support
SYSTEM MEMORY - RAM		4GB (1 x SODIMM DDR4 module) or 8GB or 16GB or 32GB (2 x SODIMM DDR4 modules)
TPM		TPM module (optional)
MASS STORAGE		1 bootable CFAST SATA III slot onboard with external access 1 x onboard connector for direct insertion of mSATA SSD SATA III 1 x onboard connector for 2,5" SSD/HDD SATA III with internal installation kit
LAN		4 x LAN 10/100/1000Mbps (RJ45 - 3 x Intel® I210 + 1 x Intel® I219LM)
USB		3 x USB 3.0, rear (Type-A) 2 x USB 2.0, rear (Type-A)
SERIAL		1 x RS232 (DB9M)
VIDEO OUTPUT		1 x DVI-D
ADD-ON INTERFACES		1 or 2 x RJ45 connectors Remote Video Link (DVI-D and USB 2.0 signals remotation up to 100m, optional)*
	Position A (max 1)	1 x RS232/422/485 (DB15M)+ 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A) 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols
Position B (max 1)		1 x connector Remote Video Link (RJ45 - RVL OUT) 2 x connectors Remote Video Link (RJ45 - RVL OUT) 1 x LAN 10/100/1000Mbps (Intel® I210) 1 x NETcore X fieldbus boards for EtherCAT, EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth/Modem adapter
	S1	1 x PCI or 1 x PCIe x4 (5 Gb/s)
EXPANSION SLOTS	S1	1 x PCI or 1 x PCIe x4 (5 Gb/s)
POWER SUPPLY INPUT		24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack Kit for ATX mode power supply (optional)
O.S. CERTIFIED		Microsoft Windows 7 Pro/Ultimate 32/64bit (PB3400) Microsoft Windows Embedded Standard 7E/7P 32/64 bit (PB3400, WES7E not for TFM) Microsoft Windows 8.1 Industry Pro 32/64bit, (PB3400) Microsoft Windows 10 IoT Enterprise 2016 64bit (PB3400 / PB3600)
OPERATING TEMPERATURE		0°C÷50°C
		0°C÷45°C with 24x7 or Core i7 processors
APPROVALS		CE, cULus LISTED (61010)

PB5000

Intel® Ivy Bridge™ based highly expandable box IPCs



The box IPC family PB5000 is based on the third generation Core i3, i5, i7 (35/45W) and Celeron (35W) of the Intel® Ivy Bridge™ platform. The "all in one" motherboard provides three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, two USB 2.0 ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video

output and a SATA II CFAST slot with external access, an mSATA connector for SATA II SSD, two SATA III connector for the installation of 2.5" HDDs/SSDs, the possibility to set the mass storages in RAID 0,1 configuration, up to 16 GB RAM with two DDR3 SODIMM modules and an internal connector for additional serial, USB or Ethernet interfaces. PB5000 systems have an

isolated 24 VDC power supply input and optionally an integrated UPS with external battery pack, or as an alternative a 110/230 VAC power supply. The systems are available in three versions, the S0 with the possibility to install additional interfaces, the S1 with a PCI or PCIe x4 slot and the S3 with three PCI slots or two PCI + one PCIe x4 slots.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- RAID 0,1 (optional)
- "All in one" motherboard
- 35W (Celeron) or 35/45W (Core i3, i5, i7) processors - Intel® Ivy Bridge™ platform
- Box IPC with 0°C÷50°C operating temperature
- 110/230 VAC or isolated 24 VDC power supply input
- Integrated UPS with external battery pack (optional, only for S0 and S1 with 24 VDC power supply)
- S1 version with one PCI or PCIe x4 expansion slot
- S3 version with three PCI or PCIe x4 expansion slots
- CE, cULus LISTED (508) certifications

Gallery



Technical data

PB5000	
PROCESSOR (on socket)	Intel® Celeron™ 1020E, 2.20GHz, 2 cores / 2 threads, 2MB Smart cache, 35W Intel® Core™ i3-3120ME, 2.40GHz, 2 cores / 4 threads, 3MB Smart cache, 35W Intel® Core™ i5-3610ME, 2.70GHz (3.3GHz Turbo), 2 cores / 4 threads, 3MB Smart cache, 35W Intel® Core™ i7-3610QE, 2.30GHz (3.3GHz Turbo), 4 cores / 8 threads, 6MB Smart cache, 45W
CHIPSET	Intel® HM76 Express Chipset
VIDEO CONTROLLER	Intel® HD Graphics, 650MHz integrated in Celeron™ microprocessor Intel® HD Graphics 4000, 650MHz integrated in Core™ microprocessor
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (2 x SODIMM DDR3 modules)
RAID	RAID 0, 1 (optional) with Intel® QM77 Express Chipset
MASS STORAGE	1 bootable CFAST SATA II slot onboard with external access 2 x onboard connectors for 2,5" SSD/HDD SATA III with internal installation kit or extractable drawers 1 x onboard connector for direct insertion of mSATA SSD SATA II
LAN	3 x LAN 10/100/1000Mbps (2 x Intel® 82574L, 1 x Intel® 82579LM)
USB	2 x USB 3.0 (Type-A) 2 x USB 2.0 (Type-A)
SERIAL	1 x RS232 (DB9M)
PS/2	1 x PS/2 for keyboard or mouse
VIDEO OUTPUT	1 x VGA or 1 x DVI-I (DVI-D + VGA)
ADD-ON INTERFACES (max 1)	1 x RS232/422/485 (DB15M) + 1 x USB 2.0 (Type-A) 1 x RS232/422/485 (DB15M) isolated + 1 x USB 2.0 (Type-A) 2 x RS232 (DB9M) 2 x USB 2.0 (Type-A) 1 x Ethernet 10/100/1000Mbps, Intel® 82574L Unmanaged Ethernet switch 4 x 10/100/1000Mbps
EXPANSION SLOTS	S0: 2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards S1: 2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 1 x PCI or 1 x PCIe x4 (5 Gb/s) S3: 2 x MiniPCI dedicated to ASEM fieldbuses, I/O and NVRAM boards 3 x PCI or 2 x PCI + 1 x PCIe x4 (5 Gb/s)
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated with or without UPS (optional) with external battery pack or 110V / 230VAC
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Windows XP Pro 32 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Windows Embedded Standard 2009 (XPe SP3) 32 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit
OPERATING TEMPERATURE	0°C÷50°C 0°C÷45°C with 24x7 HDD
APPROVALS	CE, cULus LISTED (508)

Arm Mounting IPCs

The Arm Mounting IPCs are compact, fanless, ergonomic and easy to install systems with a stylish design, that are easy to install and compatible with the most common mounting standards.

Based on Intel® Bay Trail™ platform with 15" TFT LCD or Intel® Broadwell™ platform available with 15.6", 18.5", 21.5" and 24" TFT LED Backlight LCDs in a Full IP65 aluminium chassis.



VK3200

Intel® Broadwell™ U fanless arm mounting IPCs



The fanless Arm Mounting IPC family VK3200 is based on the fifth generation Core i3, i5, i7 and Celeron of the Intel® Broadwell™ U platform. They are made of a Full IP65 cast aluminium chassis, powder coated with anti-scratch treatment compatible with the most used installation standards. The front button area is available in Hard-Wired or Fieldbus (EtherCAT Slave) versions and it is totally configurable at the order. It allows to install light indicators, buttons, lever

switches, keylock switches, encoders, an emergency stop button and USB, Ethernet or RFID interfaces (described in the "Configurations and Options" section). The "all in one" motherboard provides two USB 3.0 ports with rear external protected access and, inside the chassis, three Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 2.0 port, a SATA III CFast slot, an mSATA SSD

and up to 8 GB RAM with one DDR3 SODIMM module. The VK3200 family is available with 16 million colours LED Backlight TFT LCDs from 15.6" to 24", in Wide aspect ratio, with Aluminium True flat front panels and 5 wires resistive touchscreen or with aluminium and glass TrueFlat Multitouch front panels and projected capacitive touchscreen. VK3200 systems have an isolated 24 VDC power supply input.

+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Full IP65 chassis
- Button area with up to 15 Ø22 elements, Hard-Wired or Fieldbus versions (EtherCAT Slave)
- "All in one" motherboard
- Intel® Broadwell™ U platform
- Fanless arm mounting IPC with 0°C÷50°C operating temperature
- 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- CE, ULus LISTED (61010) certifications

Gallery



Technical data

	VK3200-TF	VK3200-TFM
LED backlight TFT LCD	15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080	15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires	P-CAP Multitouch
FRONT PANEL	True Flat Aluminum	
PROTECTION GRADE	Full IP65	
PROCESSOR	Intel® Celeron 3765U 1,9Ghz, 2 cores - 2 threads - 2MB smart cache - 15W Intel® Core™ i3-5010U 2,1Ghz, 2 cores - 4 threads - 3MB smart cache - 15W Intel® Core™ i5-5350U 1,8Ghz (2,9GHz Turbo), 2 cores - 4 threads - 3MB smart cache - 15W Intel® Core™ i7-5650U 2,2Ghz (3,1GHz Turbo), 2 cores - 4 threads - 4MB smart cache - 15W	
CHIPSET	Intel® Broadwell PCH-LP (Platform Controller Hub - Low Power) • Included into processor chip	
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor Celeron 3765U, 850MHz Clock Intel® HD Graphics 5500 integrated in microprocessor i3, 900MHz Clock Intel® HD Graphics 6000 integrated in microprocessor i5, i7, 1GHz Clock with LVDS 8bit/color digital interface	
SYSTEM MEMORY - RAM	2GB or 4GB or 8GB or 16GB (1 x SODIMM DDR3 module)	
MASS STORAGE	1 bootable CFast SATA III slot onboard with internal access 1 x onboard connector for direct insertion of mSATA SSD SATA III	
LAN	3 x LAN 10/100/1000Mbps (2 x Intel® I210-AT, 1 x Intel® I218-LM)	
USB	2 x USB 3.0, external, rear, protected, IP65 (Type-A) 2 x USB 2.0, internal (Type-A)	
ADD-ON INTERFACES	1 x RS232/422/485 (DB15M)	
Position A (max 1)	1 x RS232/422/485 (DB15M) isolated	
Position B (max 1)	1 x NETcore X fieldbus boards for EtherNet IP, PROFINET, PROFIBUS, CANopen protocols 1 x Wireless/Bluetooth adapter	
CASE	For VESA 75/100 or for pole / suspension arm mounting system compatible with RITTAL CP40/ROLEC TARAPLUS/ HASEKE ULT KÜPPLUNG 48	
Installation		
Material	Aluminium alloy EN AB46400	
Colour	Anti-scratchable painted - RAL 9006	
Accessories	Side handles, perimetral handle, keyboard holder kit	
BUTTONS AREA (optional)	Hard wired (max 8 elements) Fieldbus (EtherCAT Slave)	
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated Kit for ATX mode power supply (optional, on button area)	
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit	
OPERATING TEMPERATURE	0°C÷50°C	
APPROVALS	CE, ULus (61010)	

VPC2200

Intel® Bay Trail™ fanless arm mounting IPCs



The fanless Arm Mounting IPC family VPC2200 is based on the Celeron J1900 2GHz quad core 64 bit processor of the Intel® Bay Trail™ System On Chip (SoC) platform. They are made of a Full IP65 cast aluminium chassis, powder coated with anti-scratch treatment and it is compatible with VESA, Rolet Taraplus and Rittal CP-40 standards. A keyboard and two side modules are available, both with predisposition to install light

indicators, buttons, lever switches, keylock switches and an emergency stop button. The "all in one" motherboard provides, inside the chassis, two Ethernet 10/100/1000Mbps ports, that support "Jumbo Frame" and "Wake on Lan" functionalities, one USB 3.0 port, two USB 2.0 ports, a serial RS232 interface, a DVI-I (DVI-D + VGA) video output, a SATA II CFast slot, an mSATA connector for SATA II SSD and up to 8 GB RAM with one DDR3 SODIMM module.

The VPC2200 family is available with 16 million colours LED Backlight TFT 15" LCD in 4:3 aspect ratio, with Aluminium front panel, 5 wires resistive touchscreen and two additional USB 2.0 ports on front. VPC2200 systems have an isolated 24 VDC power supply input and the VPC2200-E version integrates a MiniPCI slot for the installation of ASEM NETcore® X fieldbus boards.



+ Highlights

- UBIQUITY remote assistance software providing remote access to the system
- Pole or Arm Mounting system, compatible with VESA 75-100, RITTAL CP40, ROLEC TARAPLUS
- Two side button areas for Ø22 elements (optional)
- Keyboard module (optional)
- "All in one" motherboard
- High performance Intel® Bay Trail™ SoC platform
- Fanless arm mounting IPC with 0-45° C operating temperature
- 15" LCD in 4:3 aspect ratio
- Isolated 24 VDC power supply input
- CE certification

Gallery



Technical data

	VPC2200	VPC2200-E
LED backlight TFT LCD	15.0" - 1024x768	
TOUCHSCREEN	Resistive 5 wires	
FRONT PANEL	Aluminium alloy with polycarbonate foil Pantone 429C colour	
PROTECTION GRADE	IP65 frontal	
PROCESSOR	Intel® Celeron J1900 2.0Ghz, 4 cores / 4 threads, 2MB L2 cache, soldered	
VIDEO CONTROLLER	Intel® HD Graphics integrated in microprocessor, 688MHz Clock 854MHz Turbo, LVDS 8bit/colour digital interface	
SYSTEM MEMORY - RAM	1GB or 2GB or 4GB or 8GB (1 x SODIMM DDR3 module)	
MASS STORAGE	1 x SSD mSATA/2.5" SATA II 1 bootable CFast SATA II slot onboard, internal access	1 x SSD mSATA/2.5" SATA II
LAN	2 x LAN 10/100/1000Mbps (2 x Intel® I210) 1 x LAN 10/100/1000Mbps (1 x Intel® I210) (optional)	2 x LAN 10/100/1000Mbps (2 x Intel® I210)
USB	2 x USB 2.0 external front, protected (Type-A) 1 x USB 3.0 internal (Type-A) 2 x USB 2.0 internal (Type-A)	
SERIAL	1 x RS232 (DB9M)	
EXPANSION SLOTS	-	1 x MiniPCI dedicated to ASEM fieldbuses boards
VIDEO OUTPUT	1 x DVI-I (DVI-D + VGA with adapter)	
CASE	Installation Material Colour	For pole or suspension arm mounting system compatible with VESA 75/100 RITTAL CP40 ROLEC TARAPLUS Steel Anti-scratchable painted RAL 7035
BUTTONS & LEDS (optional)	Side modules for emergency stop button, buttons, lights, keys and switches	
KEYBOARD (optional)	US-international layout keyboard module with 86 keys and antiglare protection also with emergency button	
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated	
O.S. CERTIFIED	Microsoft Windows 7 Pro/Ultimate 32/64 bit, Microsoft Windows Embedded Standard 7E/7P 32/64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 10 64 bit, Microsoft Windows 10 IoT Enterprise 2016 64 bit	
OPERATING TEMPERATURE	0°C÷45°C	
APPROVALS	CE	

Rack IPCs

19" 4U rack solutions with a wide range of configurations, motherboards, expansion slots and Intel® Core™ i3, i5, i7, dual and quad core processors up to Intel® Kaby Lake™ platform.



PR4047 / PR4147

Intel® Haswell™ based rack IPCs



The 19" Rack IPC PR4047/4147 family is based on the Pentium dual core and fourth generation Core™ i3, i5, i7 processors of the Intel® Haswell™ platform. The motherboard includes two Ethernet 10/100/1000Mbps ports that support "Jumbo Frame" and "Wake on Lan" functionalities, two USB 3.0 ports, six USB 2.0 ports,

one RS232 serial interface, two DisplayPort and a DVI-I (DVI-D + VGA) video outputs; on the front, two USB 2.0 ports. The motherboard also has an mSATA connector for a SATA III SSD, six SATA III connectors for 2.5" or 3.5" units (also on extractable drawers), the possibility to set the mass storages in RAID 0, 1, 5, 10 configuration and up

to 32 GB RAM with four DDR3 DIMM modules. PR4047/4147 systems are provided with 110/230 VAC power supply and are available in two versions, PR4047 with up to two 500W redundant power supplies and PR4147, with reduced depth chassis.

+ Highlights

- "Heavy-duty" motherboard for 24/7 industrial applications
- Extractable drawers for 2.5" or 3.5" mass storages
- Intel® Haswell™ dual and quad core platform
- Rack IPC with 0-40° operating temperature
- 110/230 VAC power supply input
- PR4147 version with compact cabinet
- CE certification

PR4048 / PR4148

Intel® Skylake™ based rack IPCs



The 19" Rack IPC PR4048/4148 family is based on the sixth generation Core™ i3, i5, i7 and Xeon processors of the Intel® Skylake™ platform. The motherboard includes two Ethernet 10/100/1000Mbps ports that support "Jumbo Frame" and "Wake on Lan" functionalities, four USB 3.0 ports, four USB 2.0 ports, one

RS232 serial interface, two DisplayPort and a DVI-D video outputs; on the front, two USB 3.0 ports. The motherboard also has an mSATA connector for a SATA III SSD, six SATA III connectors for 2.5" or 3.5" units (also on extractable drawers), the possibility to set the mass storages in RAID 0, 1, 5, 10 configuration and up to 64 GB RAM with four DDR4

DIMM modules. PR4048/4148 systems are provided with 110/230 VAC power supply and are available in two versions, PR4048 with up to two 500W redundant power supplies and PR4148, with reduced depth chassis.

+ Highlights

- "Heavy-duty" motherboard for 24/7 industrial applications
- Extractable drawers for 2.5" or 3.5" mass storages
- Intel® Skylake™ dual and quad core platform
- Rack IPC with 0-40° operating temperature
- 110/230 VAC power supply input
- PR4148 version with compact cabinet
- CE certification

PR4049 / PR4149 new

Intel® Kaby Lake™ based rack IPCs



The 19" Rack IPC PR4049/4149 family is based on the seventh generation Core™ i3, i5, i7 and Xeon™ processors of the Intel® Kaby Lake™ platform. The motherboard includes two Ethernet 10/100/1000Mbps ports that support "Jumbo Frame" and "Wake on Lan" functionalities, four USB 3.0 ports, four USB 2.0 ports, one

RS232 serial interface, two DisplayPort and a DVI-D video outputs; on the front, two USB 3.0 ports. The motherboard also has an mSATA connector for a SATA III SSD, six SATA III connectors for 2.5" or 3.5" units (also on extractable drawers), the possibility to set the mass storages in RAID 0, 1, 5, 10 configuration and up to 64 GB RAM with four DDR4

DIMM modules. PR4049/4149 systems are provided with 110/230 VAC power supply and are available in two versions, PR4049 with up to two 500W redundant power supplies and PR4149, with reduced depth chassis.

+ Highlights

- "Heavy-duty" motherboard for 24/7 industrial applications
- Extractable drawers for 2.5" or 3.5" mass storages
- Intel® Kaby Lake™ dual and quad core platform
- Rack IPC with 0-40° operating temperature
- 110/230 VAC power supply input
- PR4149 version with compact cabinet
- CE certification

Technical Data

	PR4047	PR4147	PR4048	PR4148	PR4049	PR4149
19" RACK CABINET	long	short	long	short	long	short
MOTHERBOARD	ATX format, D3236-S (Fujitsu)		ATX format, D3446-S2 (Fujitsu)			
PROCESSOR	Intel® Pentium™ G3260, 3.30GHz, 2 cores / 2 threads, 3MB L2, 22nm technology		Intel® Core™ i3-6100, 3,7 GHz, 2 cores / 4 threads, 3MB L2, 14nm technology		Intel® Core™ i3-7100, 3,9GHz, 2 cores / 4 threads, 3MB L2, 14nm technology	
	Intel® Core™ i3-4170, 3,7 GHz, 2 cores / 4 threads, 3MB L2, 22nm technology		Intel® Core™ i5-6400 2.7GHz (3.3GHz Turbo), 4 cores / 4 threads, 3MB L2, 14nm technology		Intel® Core™ i5-7500, 3,4GHz (3,8GHz Turbo), 4 cores / 4 threads, 6MB L2, 14nm technology	
	Intel® Core™ i5-4690 3.5GHz (3.9GHz Turbo), 4 cores / 4 threads, 6MB L2, 22nm technology		Intel® Core™ i5-6600, 3,3 GHz (3,9 GHz Turbo), 4 cores / 4 threads, 6MB L2, 14nm technology		Intel® Core™ i5-7600, 3,5GHz (4,1GHz Turbo), 4 cores / 4 threads, 6MB L2, 14nm technology	
	Intel® Core™ i7-4790, 3.6GHz, 4 cores / 8 threads, 8MB L2, 22nm technology		Intel® Core™ i7-6700, 3,4 GHz (4,0 GHz Turbo), 4 cores / 8 threads, 8MB L2, 14nm technology		Intel® Core™ i7-7700, 3,6GHz (4,2GHz Turbo), 4 cores / 8 threads, 8MB L2, 14nm technology	
CHIPSET	Intel® Q87 Chipset		Intel® C236 Express Chipset			
	Microsoft Windows 8 32/64 bit, Microsoft Windows 7 Pro/Ultimate 32/64 bit		Microsoft Windows 10 IoT Enterprise 64 bit, Microsoft Windows 8.1 Industry Pro 32/64 bit, Microsoft Windows 7 32/64 bit, Microsoft Windows Server 2012 R2 64 bit Standard Edition		Microsoft Windows 10 IoT Enterprise 64 bit	
	Intel® HD Graphics, 650MHz integrated into Pentium		Intel® HD Graphics 530 integrated in Core i3-6100 processors, 350MHz/1,05GHz		Intel® HD Graphics 630 integrated in Core i3-7100, i5-7500 processors, 350MHz/1,10GHz	
VIDEO CONTROLLER	Intel® HD Graphics 4400, 350MHz integrated into Core™ i3		Intel® HD Graphics 530 integrated in Core i5-6600, Core i7-6700 processors, 350MHz/1,15GHz		Intel® HD Graphics 630 integrated in Core i5-7600, Core i7-7700 and Xeon processors, 350MHz/1,15GHz	
	Intel® HD Graphics 4600, 650MHz integrated into Core™ i5 and Core™ i7		Intel® HD Graphics P530 integrated in Xeon processors, 400MHz/1,15GHz DirectX 12 and OpenGL 4.4 support		Intel® HD Graphics 630 integrated in Core i5-7600, Core i7-7700 and Xeon processors, 350MHz/1,15GHz	
	DX11 and OpenGL 3.0 support		DirectX 12 and OpenGL 4.4 support		DirectX 12 and OpenGL 4.4 support	
SYSTEM MEMORY	4GB / 8GB / 16GB / 32GB		4GB / 8GB / 16GB / 32GB / 64GB DDR4			
EXPANSION SLOTS	4 x PCI full size (32 bit, 33MHz, Rev.2.3) 2 x PCIe x16 (16 lanes, Gen2, 4 lanes, Gen2) 1 x PCIe x8 (1 lane, Gen2)		2 x PCI full size (32 bit, 33MHz, Rev.2.3) 2 x PCIe x16 (16 lanes, Gen3, 4 lanes, Gen3) 1 x PCIe x8 (1 lane, Gen3) 2 x PCIe x4 (4 lanes, Gen3, 1 lane, Gen3)			
DRIVE BAY	3 x 5,25" external	3 x 5,25" external	3 x 5,25" external	3 x 5,25" external	3 x 5,25" external	3 x 5,25" external
	1 x 3,5" external + 2 x 3,5" internal	1 x 3,5" external + 3 x 3,5" internal	1 x 3,5" external + 2 x 3,5" internal	1 x 3,5" external + 3 x 3,5" internal	1 x 3,5" external + 2 x 3,5" internal	1 x 3,5" external + 3 x 3,5" internal
SPECIAL FEATURES	24/7 operation					
DRIVE INTERFACES	1 x mSATA III 6Gbit/s 6 x SATA III 6Gbit/s					
MASS STORAGE	up to 4 x HDD 3,5" SATA III without or with extractable drawer in a 5,25" bay (max 3) up to 4 x SSD 2,5" SATA III without or with extractable drawer in a 3,5" bay (max 2)					
RAID	RAID 0, 1, 5, 10 on SATA III					
OPTICAL DRIVE	1 x DVD-RW					
LAN	2 x LAN 10/100/1000Mbps (1 x Intel® I210AT, 1 x Intel® I217LM)		2 x LAN 10/100/1000Mbps (1 x Intel® I210AT, 1 x Intel® I219LM)			
USB	2 x USB 3.0 rear (Type-A) 6 x USB 2.0 rear (Type-A) 2 x USB 2.0 front (Type-A)		4 x USB 3.0 rear (Type-A) 4 x USB 2.0 rear (Type-A) 2 x USB 3.0 front (Type-A)			
SERIAL	1 x RS232 (DB9M)					
KEYBOARD & MOUSE	2 x PS/2 (K/M)					
VIDEO OUTPUT	1 x DVI-I 2 x DisplayPort					
AUDIO	Realtek ALC671, 5.1-channel, High Definition Audio Codec, S/PDIF Audio Mic In, Line in, Line out					
ADDITIONAL INTERFACES	1 x RS232 (DB9M)		1 x RS232 (DB9M)			
	1 x USB 2.0 for internal dongle		2 x USB 2.0 for internal dongle			
	1 x LPT EPP, ECP bidirectional					
POWER SUPPLY INPUT	230VAC 400/650W 230VAC 2 x 500W	230VAC 400/650W	230VAC 400/650W 230VAC 2 x 500W	230VAC 400/650W	230VAC 400/650W 230VAC 2 x 500W	230VAC 400/650W
DIMENSIONS w-h-d	48.3 x 17.8 x 50.3 cm	48.3 x 17.8 x 46.5 cm	48.3 x 17.8 x 50.3 cm	48.3 x 17.8 x 46.5 cm	48.3 x 17.8 x 50.3 cm	48.3 x 17.8 x 46.5 cm
OPERATING TEMPERATURE	0°- 40°C with 24x7 HDD 5°- 40°C with standard HDD					
APPROVALS	CE					

Industrial Monitors

The panel Industrial Monitors are available with LCDs from 8.4" to 24", with 4:3, 5:4 or Wide format, and four front panel variants.

Arm Mounting Monitors are compact, fanless, ergonomic and easy to install solutions, compatible with the most common mounting standards and are available with 15.6", 18.5", 21.5" and 24" TFT LCDs in a full IP65 aluminium chassis.

MHR100 and MKR100 versions integrate the remotation technology for digital video and USB 2.0 signal up to 100 m with a Cat 5e SF/UTP or Cat 6A S/FTP cable.



MH100 / MHR100

Panel Mounting industrial monitors



The panel monitor family MH100/MHR100 is available with 16 million colours LED Backlight TFT LCDs from 8.4" to 24", in 4:3, 5:4 and Wide aspect ratio, with Aluminium or Aluminium True flat front panels, 5 wires resistive touchscreen and an additional USB 2.0 port on front. As an alternative, the systems with 12.1", 15", 17" and 19"


LCD can have a Stainless Steel True Flat front panel. All version with Wide LCDs are also available with aluminium and glass TrueFlat Multitouch front panels, with projected capacitive touchscreen. MH100/MHR100 monitors have an isolated 24 VDC or optionally 110/230 VAC power supply input.

MH100 versions have a VGA and a DVI-D standard input. MHR100 versions integrate the remotation technology for DVI and USB 2.0 signals that allows the connection of the IPC within 100 meters with a Cat 5e SF/UTP or CAT6A S/FTP cable.

Gallery



Remotation

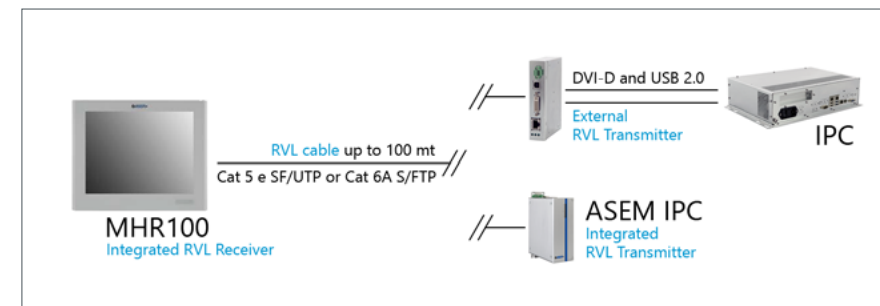

Technical data

	MH	MH-TF	MH-TFX	MH-TFM	MHR100	MHR100-TF	MHR100-TFX	MHR100-TFM	
LED backlight TFT LCD	8.4" - 800x600 10.1" W - 1280x800 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	10.4" - 800x600 12.1" - 800x600 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 17" - 1280x1024 19" - 1280x1024	10.1" W - 1280x800 12.1" W - 1280x800 15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080	8.4" - 800x600 10.1" W - 1280x800 10.4" - 800x600 12.1" - 800x600 12.1" - 1024x768 12.1" W - 1280x800 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	12.1" - 800x600 12.1" - 1024x768 15.0" - 1024x768 15.6" W - 1366x768 15.6" W - 1366x768 15.6" W - 1920x1080 17" - 1280x1024 17" - 1280x1024 18.5" W - 1366x768 18.5" W - 1920x1080 19" - 1280x1024 21.5" W - 1920x1080 24" W - 1920x1080	10.1" W - 1280x800 12.1" W - 1280x800 15.6" W - 1366x768 15.6" W - 1920x1080 18.5" W - 1366x768 18.5" W - 1920x1080 21.5" W - 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch	Resistive 5 wires GFG (optional)	Resistive 5 wires	Resistive 5 wires	P-CAP Multitouch	
T/S CONTROLLER	USB / Serial			USB	USB				
FRONT PANEL	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium	Aluminium	True Flat Aluminium	Stainless Steel True Flat	True Flat Aluminium	
PROTECTION GRADE	IP66 - frontal								
VIDEO INPUT	1 x VGA 1 x DVI-D				1 x RJ45 remotation with Cat 5e SF/UTP or Cat 6A S/FTP cable				
USB	2 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		2 x USB 2.0 rear (Type-A)		2 x USB 2.0 rear (Type-A) 1 x USB 2.0 front (Type-A)		2 x USB 2.0 rear (Type-A)		
REMOTATION	Remotation of DVI-D and USB 2.0 signals up to 100mt with Cat 5e SF/UTP cable or Cat 6A S/FTP cable								
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated 24VDC (optional) 110V/230VAC (optional)				24VDC (18÷32VDC) isolated 110/230VAC (optional)				
OPERATING TEMPERATURE	0° ÷ +50°C								
APPROVALS	CE, cULus LISTED (508)				CE, cULus LISTED (61010)				



+ Highlights

- Industrial Monitor with 0°C÷50°C operating temperature
- 8.4", 10.4", 12.1" and 15" LCDs in 4:3 aspect ratio, 17" and 19" LCDs in 5:4 aspect ratio, 10.1", 12.1", 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input or 110/230 VAC power supply (optional)
- MHR100 version with remotation of DVI and USB 2.0 signals up to 100m
- CE, cULus LISTED (508) certifications

MK100 / MKR100

Arm Mounting industrial monitors



The arm mounting monitors of the MK100/MKR100 family are made of a Full IP65 cast aluminium chassis, powder coated with anti-scratch treatment, compatible with the most used installation standards. The front button area is available in Hard-Wired or Fieldbus (EtherCAT Slave) versions and it is totally configurable at the order. It allows to install light indicators, buttons, lever switches, keylock switches,

encoders, an emergency stop button and USB, Ethernet or RFID interfaces (described in the "Configurations and Options" section). They are available with 16 million colours LED Backlight TFT LCDs from 15.6" to 24", in Wide aspect ratio with Aluminium True flat front panels and 5 wires resistive touchscreen or with aluminium and glass TrueFlat Multitouch front panels and projected capacitive

touchscreen. MK100/MKR100 monitors have an isolated 24 VDC power supply input. MK100 versions have a VGA and a DVI-D standard input. MKR100 versions integrate the remotation technology for DVI and USB 2.0 signals that allows the connection of the IPC within 100 meters with a Cat 5e SF/UTP or CAT6A S/FTP cable.




+ Highlights

- Full IP65 chassis
- Button area with up to 15 Ø22 elements, Hard-Wired or Fieldbus versions (EtherCAT Slave)
- Arm Mounting Monitor with 0°C÷50°C operating temperature
- 15.6", 18.5", 21.5" and 24" LCDs in Wide aspect ratio
- Isolated 24 VDC power supply input
- MKR100 version with remotation of DVI and USB 2.0 signals up to 100m
- CE, ULus LISTED (61010) certifications

Gallery



Remotation

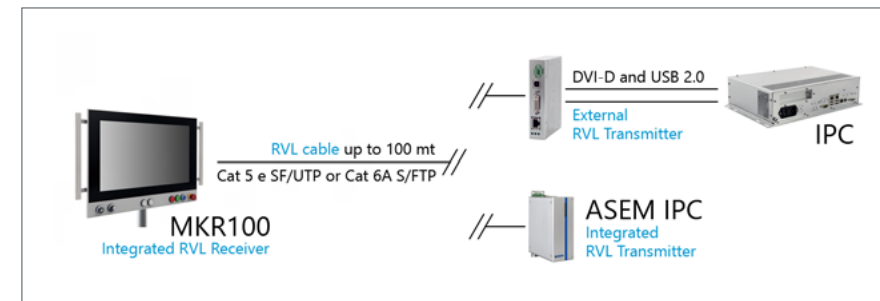

Technical data

	MK100-TF	MK100-TFM	MKR100-TF	MKR100-TFM
LED backlight TFT LCD	15.6" W - 1366x768 15.6" W - 1920x1080 18.5"W - 1366x768 18.5"W - 1920x1080 21.5" W- 1920x1080	15.6" W - 1366x768 15.6" W - 1920x1080 18.5"W - 1366x768 18.5"W - 1920x1080 21.5" W- 1920x1080 24" W - 1920x1080	15.6" W - 1366x768 15.6" W - 1920x1080 18.5"W - 1366x768 18.5"W - 1920x1080 21.5" W- 1920x1080	15.6" W - 1366x768 15.6" W - 1920x1080 18.5"W - 1366x768 18.5"W - 1920x1080 21.5" W- 1920x1080 24" W - 1920x1080
TOUCHSCREEN	Resistive 5 wires	P-CAP Multitouch	Resistive 5 wires	P-CAP Multitouch
T/S CONTROLLER	USB 2.0			
FRONT PANEL	True Flat Aluminium	True Flat Aluminium	True Flat Aluminium	True Flat Aluminium
PROTECTION GRADE	Full IP65			
VIDEO INPUT	1 x VGA 1 x DVI-D		1 x RJ45 remotation with Cat 5e SF/UTP or Cat 6A S/FTP cable	
USB	2 x USB 2.0 rear, protected, IP65 (Type-A)			
CASE	Installation	For VESA 75/100 or for pole / suspension arm mounting, system compatible with RITTAL CP40 / ROLEC TARAPLUS / HASEKE HLT KUPPLUNG 48		
	Material	Aluminium alloy EN AB46400		
	Colour	Anti-scratchable painted - RAL 9006		
	Accessories	Side handles, perimetral handle, keyboard holder kit		
BUTTONS AREA (hard wired or slave modular fieldbus version)	Buttons, lights and interfaces on the front panel are optional. 1 x Emergency stop button (always hard wired), 1 x RFID (internally connected to USB), 1 x Wifi/Bluetooth (internally connected to USB), 1 x USB port, lights, button keys and switches (hard wired or fieldbus). Several industrial fieldbus masters are supported. The push-button panel design allows easy device substitution.			
REMOTATION	Remotation of DVI-D and USB 2.0 signals up to 100mt with Cat 5e SF/UTP cable or Cat 6A S/FTP cable			
POWER SUPPLY INPUT	24VDC (18÷32VDC) isolated			
OPERATING TEMPERATURE	0°C÷50°C			
APPROVALS	CE, ULus LISTED (61010)			

Video remotation solutions

Remote Video Link (RVL) is the ASEM solution for the remotation of DVI-D and USB signals

The solution is composed by the RVL Receiver, the RVL Transmitter and a simple Cat. 6A S/FTP or Cat. 5e SF/UTP Ethernet cable and allows to connect a monitor up

to 100 meters far from the IPC. The RVL Receivers and Transmitters are integrated in several ASEM Industrial PCs and monitors or can be supplied as external modules

to create long distance connections between PCs and monitors manufactured by ASEM or by other suppliers.




Configurations & Options

Integrated Receiver and Transmitter



Integrated Receiver and external Transmitter

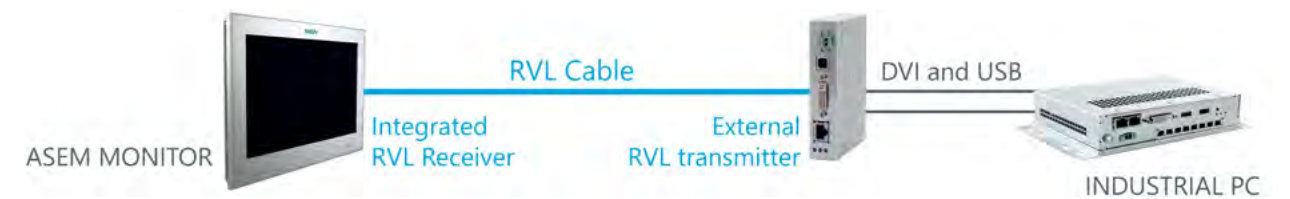

External Receiver and integrated Transmitter



External Receiver and Transmitter



Fieldbuses boards




NETcore® X

NETcore®X fieldbus boards are the link between the IPC and the I/O devices on field and enable control and visualization applications to receive data from the field according to the industrial fieldbuses available.

To be integrated on all ASEM systems, different formats are available, according to the systems they are addressed to.



NETcore® X Industrial Ethernet



NETcore® X Profibus



NETcore® X CANopen



Dual CAN-RAW

Board	Protocols	HT/PB/BM	VK3200	PCI/APCI	MiniPCI / MiniAPCI
NETcore X PROFIBUS	Profibus DP Master/Slave, MPI	✓	✓	✓	✓
NETcore X CANopen	CANopen Master/Slave	✓	✓	✓	✓
NETcore X Industrial Ethernet	EtherCAT Master/Slave	✓	-	✓	✓
	PROFINET IO Controller/Device	✓	✓	✓	✓
CAN RAW	Ethernet/IP Scanner/Adapter	✓	✓	✓	✓
	CANopen Master in combination with CODESYS (2 x isolated channels also with 512kB NVRAM)	-	-	✓	✓
NVRAM	512kB static RAM for SoftPLC	-	-	-	✓
ETHERNET	EtherCAT Master in combination with CODESYS	-	-	✓	✓

NETcore®X and proprietary application

A DLL library is available for developing applications under Win32 or WinCE operating systems. All DLL programming languages such as C, C++ or .NET are available.

NETcore®X with CODESYS

Using NETcore®X fieldbus boards, the integration with CODESYS is automatic and does not require any code to implement the communication stack.

NETcore®X with PremiumHMI

Premium HMI uses NETcore®X boards with SIEMENS MPI and PROFIBUS Slave protocols, using a dedicated communication driver.

Wireless modules



Wifi and mobile modules

Wireless modules allow ASEM systems to be accessible from a remote position, without a cable connection. According to specific needs, Wi-Fi adapters for local connection and/or 2G/3G/4G-LTE modems (for internet connection in covered areas) can be used.

Several formats are available, according to the systems that will include the device/s.



WiFi / Bluetooth adapter and 2G/3G/4G modem



Carrier for RT40



Carrier for HT Series



Carrier for VK3200

		Panel ARM based IPCs	Panel IPCs / Box IPCs	Arm Mounting IPCs
WI-FI + BLUETOOTH	Standard	IEEE 802.11 b/g/n	IEEE 802.11 a/b/g/n + Bluetooth V4.0 LE/ V3.0+HS/ V2.1+EDR	
	Features	Client mode	Client / Access point mode (Wi-Fi)	
	Security	WEP, TKIP, AES, WPA and WPA2	64/128-Abits WEP, WPA, WPA2 (Wi-Fi)	
	Rx Sensitivity	802.11b -80dBm@8%, 802.11g -70dBm@10%, 802.11n -64dBm@10%	802.11a: -73dBm / 802.11g: -74dBm / 802.11n(2,4GHz): -72dBm@HT20, -69dBm@HT40 / 802.11n(5GHz): -69dBm@HT20, -68dBm@HT40 (Wi-Fi) <0.1% BER at -70dBm (Bluetooth)	
	Antenna	1 x RP-SMA-F	2 x RP-SMA-F	
CELLULAR NETWORK	Standard	Standards: 2G/3G/3G + EDGE/HSPA, up to 5,76Mbps upload / 21,6Mbps download Regions: All Continents		-
		Standards: 2G/3G/4G LTE, up to 50Mbps upload / 100Mbps download Regions: Europe, Latin America, Asia, Africa, Oceania		
		Standards: 3G/4G LTE, up to 50Mbps upload / 100Mbps download Regions: North America, Latin America		
	Antenna	1 x SMA-F connector		-
	SIM	1x SIM card socket push-push type		-
SUPPORTED O.S.		Windows CE Linux Yocto (2.2.1)	Microsoft Windows 7 Microsoft Windows 8.1 Microsoft Windows 10	
AVAILABLE FOR		RT40	HT2150, HT2200, HT3200, HT3400/HT3600 BM2150 PB2150, PB2200, PB3200, PB3400/PB3600	VK3200

Front panels

True Flat technology

ASEM realizes the True Flat front panel through a special manufacturing process which takes place in a clean room to avoid environmental contamination such as dust or airborne microbes.


In this process, using an Optically Clear Adhesive (OCA) a thin polyester film is glued on the touchscreen, then the two components are attached on the Aluminium front panel.



Glass Multitouch technology

All Panel IPC and monitor families are available with the new generation of Multitouch front panels in 7", 10.1", 12.1", 15.6", 18.5", 21.5" and 24" screen sizes with Wide aspect ratio. Glass projected Capacitive Touchscreen Technology allows mobile gestures such as zoom, swipe and rotate (even with work gloves), now

increasingly adopted in the factory automation. Multitouch front panels are made of a robust aluminium frame and a tempered glass surface in a completely true-flat design that gives maximum resistance to environmental influences and facilitates cleaning.




Stainless Steel True Flat Front Panel

Panel IPCs with Stainless Steel True Flat front panels without USB port on the front are particularly used in pharmaceutical and food & beverage industries.




Touchscreen Glass-Film-Glass Technology


The option Glass-Film-Glass (GFG) for 12", 15" and 17" touchscreen is available for most of the ASEM IPCs and monitors. In GFG touchscreen, there is an additional thin glass (0,1 mm) on the touch surface that provides greater resistance to scratches and a better products cleaning.

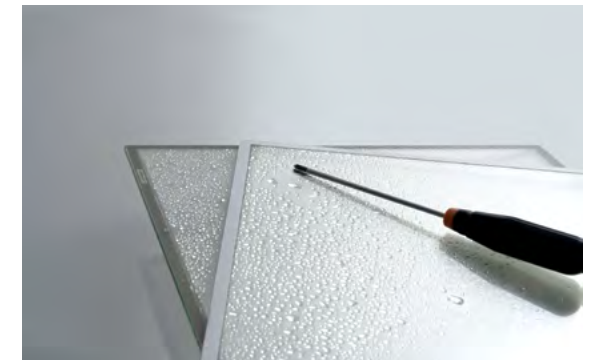

GFG technology

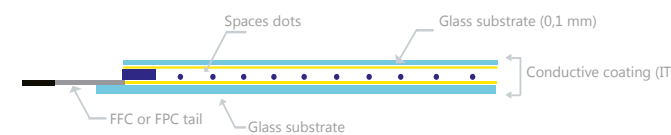

Standard technology

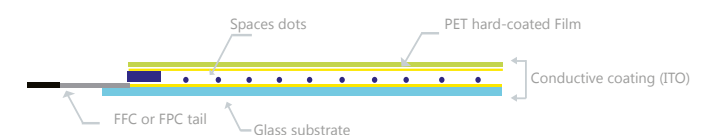

Configurable button area for Arm Mounting IPCs and Monitors

The button area of the VK3200 and MK100/ MKR100 Arm Mounting systems is totally configurable at the order, depending on customer's requirements, and allows front access for further modifications and/or integrations.

Connections

The single elements of the button area can be connected in two ways: hard wired or via fieldbus.

Hard wiring

With the hard wired connection it is possible to install up to eight elements (excluding the USB, Ethernet and RFID interfaces), whose wiring is brought to two clamps, accessible from the back.

Fieldbus button area

The implemented fieldbus standard is EtherCAT. The quantity of elements that is possible to install on the systems with fieldbus button area depends on the display size: up to 9 with the 15.6" LCD, up to 11 with the 18,5" LCD, up to 13 with the 21,5" LCD and up to 15 with the 24" LCD, including USB, Ethernet, RFID interfaces and the emergency stop button.



Front access to the wiring of the button area



View of the rear clamps of a hard wired button area



View of the rear connectors of a Fieldbus button area

A wide range of elements is available to compose the button area of the Arm Mounting systems.

Push buttons

- unlit
- LED lit (5 colours available)
- with custom exchangeable symbol
- for ATX mode power up

Emergency stop button

- with rotating unlock movement
- double contact

Keylock switch and levers

- with key
- keyless LED lit
- with 2 or 3 positions

Buzzer

Incremental Encoder

WiFi/Bluetooth
On Ø 22 element

Communication ports

- With IP65 protection cap
- USB port
- Ethernet port

RFID

- On Ø 22 element
- LF (125 kHz)
- HF (13,56 MHz)

LED indicators
→ LED lit (5 colours available)



Mechanical accessories for Arm Mounting IPCs and Monitors

Side handles

Kit composed of two aluminium side handles is available for simplifying system moving.



Perimetral handle

A perimetral handle to simplify system movements and protect the operator from accidental impacts.



Keyboard holder kit


Keyboard holder kit, including a cable hole on the rear cover, with a rubber wire holder.




Installation possibilities



Pole Arm Mounting

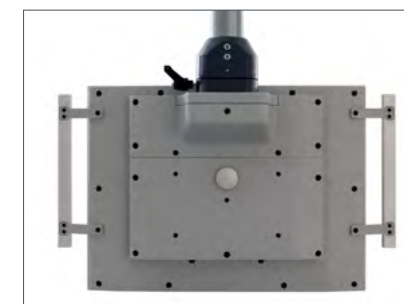

Suspension Arm Mounting

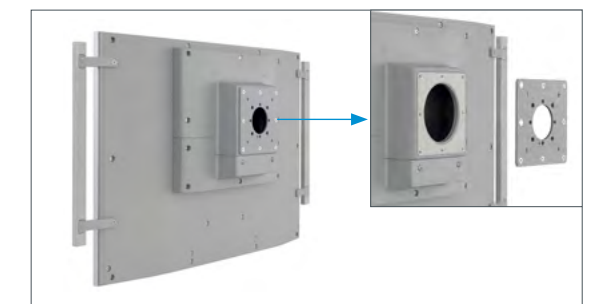

VESA-75 / VESA-100

Technical support and service

Customer oriented philosophy

Providing a meticulous attention and a complete pre and post sales service is the foundational concept of our customer oriented service. All internal processes aim to ensure an excellent

product quality and a higher degree of flexibility, in order to be responsive to the ever-changing market needs. To ensure product and process quality, ASEM has adopted the standard UNI EN ISO 9001:2008 for its quality management system.



Intertek
9809792

Customer care

The customer care service is led by a team of technical specialists that answer with immediacy and clarity to customers' needs, not only by telephone and via the Internet, but also with on-site visits and technical training courses. To optimize the process of support and repair of systems and to minimize response time, ASEM offers some effective services:

"HELP DESK PHONE"

SERVICE can be accessed calling +39/0432/967250, from Monday to Friday from 09:00 to 12:30 and from 14:00 to 17:30. A qualified technician provides initial assistance, or starts the procedure for repairing or replacing the product (Return Material Authorization). Based on needs and the type of support required, the call may be turned to the most suitable ASEM specialist.


"HELP DESK ONLINE"

SERVICE allows access to the ASEM customer care service directly online, through the company website www.asem.it. This easy and quick tool allows to request technical assistance for any repair service, with real-time monitoring of the request status. In addition to these services, you can send any request for hardware, firmware and software support to the e-mail address suptec@asem.it.

Technical support

ASEM offers an excellent service of hardware and software consulting and assistance. It also includes a prompt and efficient system service assistance with the creation of ad-hoc operating system images, which allows to shrink the memory space needed for the installation of the operating systems (Microsoft Windows® CE,

Windows® XP and Windows® XP Embedded, Windows® 7, Windows® 7 Embedded, Microsoft Windows, Windows 8.1, Windows 10 2016, Windows 10 IoT Enterprise 2016, Linux and OS real time) maintaining only the necessary components for the proper functioning of the industrial PCs and the integration with the main applicative software.

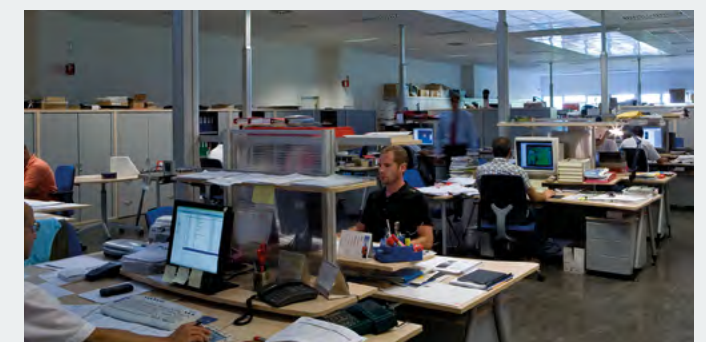

Technical support & Services



ASEM S.p.A.

ASEM | Artegna | Headquarters
Via Buia 4
33011 Artegna (UD) | Italia
Phone: +39/0432-9671
Fax: +39/0432-977465

ASEM | Giussano
Via Prealpi 13/A
20833 Giussano (MB) | Italia
Phone: +39/0362-859111
Fax: +39/0362-859121

ASEM | Germany
Walbenstraße 41
72127 Kusterdingen-Wankheim
Phone: +49 (0) 7071 7963 070
Fax: +49 (0) 7071 7963 071

email: industrialautomation@asem.it
website: www.asem.it

USER INFORMATION

Copyright © ASEM 2018. All rights reserved. ASEM reserves the right to make changes, corrections and improvements to the products and programs described at its sole discretion and at any time, without any obligation to notify users. Nor can be excluded inconsistencies and inaccuracies, despite the continued pursuit of perfection. The content of this document is still subject to periodic review. Pictures, diagrams and examples in this document are for illustrative purposes only. ASEM decline any responsibility or liability for actual use based on the examples, diagrams and technical data therein reported. Premium HMI®, NETcore® are ASEM trademarks. Microsoft, Windows, Windows CE, Windows logo sare Microsoft Corporation trademarks. Celeron, Core™, Intel®, il logo Intel®, Intel® Atom, Intel Core™, Pentium Intel® Corporation trademarks in the United States and/or in other countrie. Other corporate, product or service names mentioned in this publication can refer to trademarks or service of other company.